

SEGA[®] COMPUTER

The Official Sega User Club Magazine

JULY/AUGUST 1986

In this Issue:

KARATE

SEGA BASE PATCH

'SEGA IS SUPREME' COMPETITION

NEWS AND REVIEWS

WORD PROCESSING WITH YOUR SEGA

HACKERS CORNER

SEGA PROGRAMMING Part 1




MUSIC

A fully featured music editor, complete with two keyboard overlays, capable of composition, transcription, changing key signatures, playing as a piano or organ and recording your musical compositions. Fantastic value for all music lovers.

**Only
Available From
SEGA
SOFTWARE
SUPPORT**

P.O. Box 10-207
Auckland 4
New Zealand

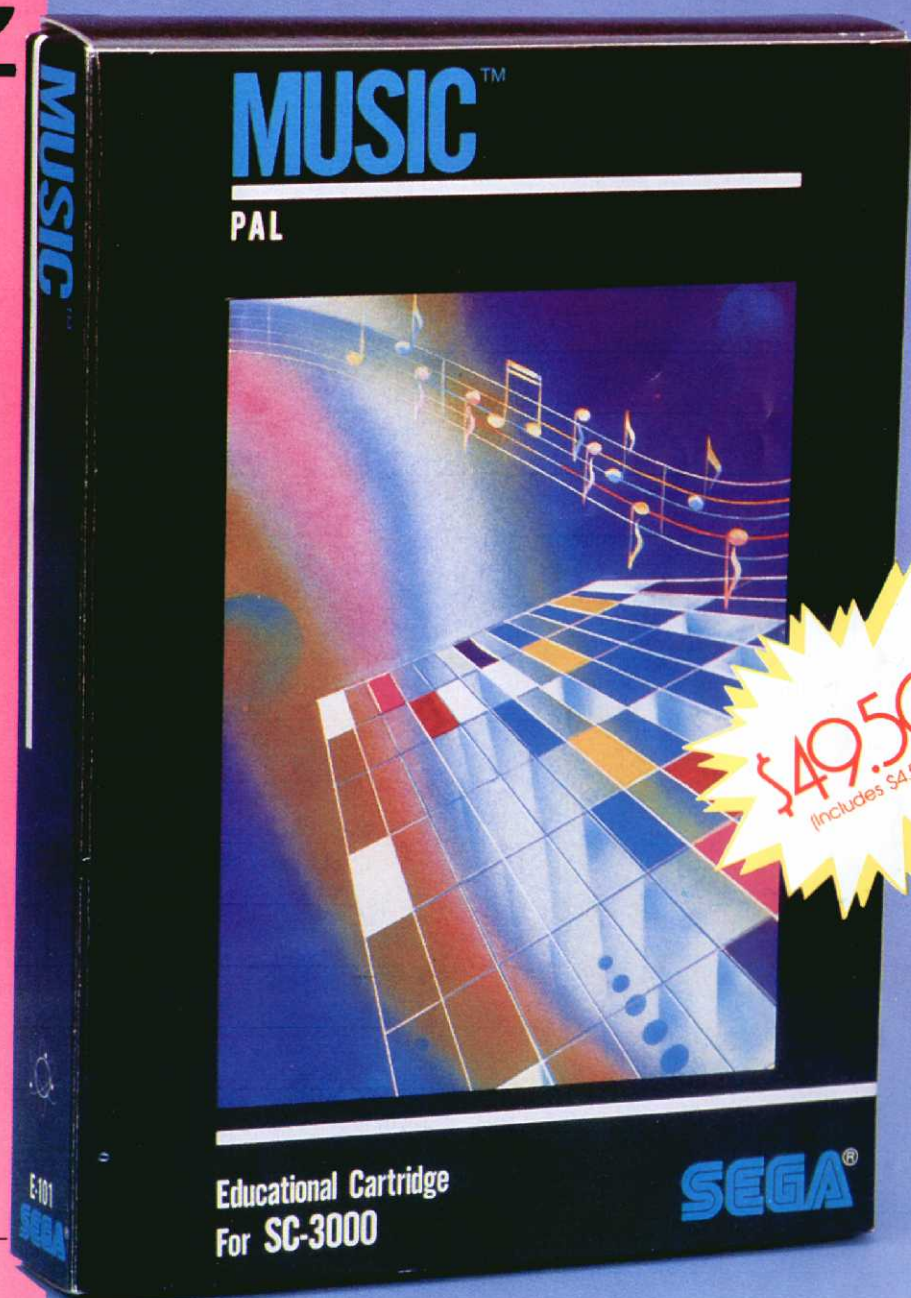

SEGA[®]

COMPUTER

The official magazine of
the Sega User Club, New
Zealand.

Registered as a magazine at the CPO Wellington, New Zealand. Published bi-monthly. Magazine published about the middle of July, Sept, Nov, Jan, Mar, May.

Published by:
Sega Software Support
P.O. Box 10-207
Auckland, 4.
NEW ZEALAND

Telephone (09) 603-274

Editor: Glenys Millington

All contributions welcome. Name, address and phone number must be included.

All software programs published by the magazine become the property of Sega Software Support unless by prior arrangement. They are accepted on the basis that they are the original work of the author. The programs must be submitted on tape or disc and a printed listing is desirable. Software is not returned unless accompanied by a stamped self addressed envelope.

For overseas contributions, please enclose a \$1 note/coin of the country of origin if software is to be returned.

A plea for software listings - please check your software thoroughly for errors and spelling before sending it to us. Please update us on any errors you know about so that we can publish corrections.

We pay \$NZ20.00 for the feature software program published each month and \$NZ4.00 for all other full programs published.

Articles or reviews must be legible. Articles or reviews are paid \$NZ4.00 per page on a prorata basis.

All contributions are subject to approval by the editor and may be edited to suit the magazine style. All payments are made after publication.

SEGA USER CLUB

MEMBERSHIP YEAR JULY 1986 - JUNE '87

Membership includes a subscription to the Club magazine SEGA COMPUTER as well as qualifying for other club benefits.

NEW ZEALAND

Membership Subscription: \$40.09 incl. GST,
after Sept 30, \$40.70 incl. GST.

Back copies available:

\$6.50 each, \$35.00 complete 1985/86 year

AUSTRALIA

Membership Subscription:
\$NZ50.00 Airmail, \$NZ46.00 Surface Mail

ELSEWHERE

Membership Subscriptions available on request.

CONTENTS

2. Letters
4. Karate - Programs
12. Sega Base Patch - Program
13. Sega Is Supreme Competition
15. Sega Survey Sheet
17. News and Reviews
18. Review - Sega Speech Processor
19. Word Processing With Your Sega Computer
23. Hackers Corner - Mike Howard
25. Bubble Trouble - Program
26. Sega Programming - Part 1
31. High Score Challenge
32. Micro Ads/Sega User Groups



Here it is! The first "official" magazine from Sega Software Support. To those who received faulty copies of the May/June issue our apologies - there must have been gremlins at work.

What a hectic couple of months it has been since we took over from Grandstand. What with the catalogue and the deluge of orders that resulted from it, then trying to bring the magazine back into the right time-frame, the family think their throats have been cut having constant hamburgers and/or fish and chips for tea.

We have a great line-up of programs, reviews and the first instalment of Sega Programming, for you in this issue. Our thanks to those who have contributed, without contributions we wouldn't have a magazine worth publishing. Keep up the good work!

In the centre of this issue you'll find a TERRIFIC competition with some FANTASTIC prizes. Get your entries in before October 10 to qualify for the draw on October 15.


Included with the competition is a survey form. We want to know what YOU want in YOUR magazine. It's vital that you return it so that the magazine can more accurately reflect what you want.

Don't forget your survey form MUST be returned with your competition entry to be in the draw.

Now on with the magazine.

Glenys Millington
Glenys Millington
EDITOR

LETTERS ... to THE EDITOR.

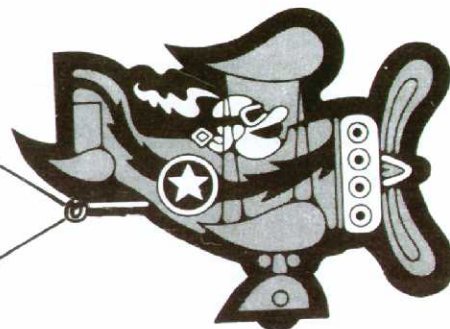

DEAR EDITOR

I am trying to get a Sega User Club going in Rotorua. I have advertised on the radio and in your magazine. I have had ONE reply! If there are any Sega users out there please contact me on Ph. 59-325. Thank you.

Terry Cole, Rotorua

EDITOR'S REPLY

Come on all you Rotoruans, I know there are plenty of you out there with Sega's. Give Terry a call - you'll be amazed at how much you can learn and how much fun User Groups can be.

DEAR EDITOR

Just a note to say I'm glad that support is being maintained (and hopefully improved) for the Sega.

Regarding the magazine, here is a request that you keep up the educational component: ie. more concerning machine code, memory mapping, accessing the other two screens and how to create high-res graphics. Keep up the good work!

Paul Dumble, Hamilton

DEAR EDITOR

I have a question. John Sands (Australia) were advertising Sega computers with 32K RAM expandable to 48K. Is there likely to be any further hardware made available to say double these figures?. I am finding the present 32K insufficient particularly with disk drive.

R J Thorpe, Napier

EDITOR'S REPLY

All we have heard is that Scott McDonald in Sydney is writing a new version of the BASIC which will release 40K for programming. As yet, this has not been completed. Everyone will be advised when it is ready via the magazine.

DEAR EDITOR

Recently I purchased the program Empire and the book 'More Than 50 Programs' for the Sega 3000. Upon listing the program I found an error in line 1450 which reads - IF R = 8 THEN FOR N1 = 1 TO Z: GOSUB 4000:NEXT N1. I found that line 4000 does not exist. In the book I found an error in the program called The Land Of Sorcery on line 350 which reads INPUT Q:Q=INT(Q) IF Q (O or Q)4 THEN 610. 610 does not exist and the program only goes up to line 590. I would be grateful for the corrections as I would like to get the programs working correctly.

Jeremy Bennett, Henderson

EDITOR'S REPLY

Try this. 4000 CLS:PRINT "CONGRATULATIONS PRIME MINISTER!":FOR II = 1 TO 400:RETURN and for the second 610 GOTO 350. Add these lines in and see if the programs continue.

DEAR EDITOR

Due to a recent spell in bed with a dose of the Waikato "greebies" I had the opportunity to re-read all my back copies of the Sega magazine, but instead of solving one or two problems I seem to have more than I started with - HELP!!!

1. In the very first magazine R Sloane wrote asking about 225 hues of colour produceable. The answer mentioned a program, but no program was printed. What was the program?

2. In the Christmas edition, on page 30, a maths program gives - line 50 $X\$ = X\$ + / - X\$$ with no $+ / -$ key - how do I enter that on?

3. I picked up a copy of another NZ computer mag which gave a machine code program and a sentence as follows:-

"Appended is the same program in the (Basic) format which can be run on the Sega". Does this mean M/C programs cannot be entered without some special formula?. And lastly

4. Could you please produce a program which could produce random lists of letters inputted and no repeated letters in the lists unless of course the letters were duplicated in the inputted word.

Thanks for the continuing interesting magazine, I hope the change of management will prove beneficial.

B Turnell, Waikeria

EDITOR'S REPLY

1. See page 19 same issue.

2. Enter $+$, not $+ / -$

3. Yes, because the internal ROM addresses are different. Knowledge is required rather than formula!

4. A challenge for our readers. I know someone who once wrote one but the problem is that the total number of combinations from a word of n letters is $n!$ (ie. for 10 letter word it is $10 \times 9 \times 8 \times 7 \times 6 \times 5 \times 4 \times 3 \times 2 \times 1 = 3,628,800$. To use r letters from a n letter word the formula is $n!/(n-r)!$ All this means is that a 10 letter word can generate mountains of combinations and you would need to visually sort through them yourself or run them through a dictionary program somehow.

DEAR EDITOR

Since writing to you last time one additional matter has come to mind. It would be very interesting and in some cases critical to know how much space each program listed in the club magazine or any book takes up. This applies not only to games programs but to the various software programs. For example the Sega "Easy Writer" program available on tape takes up just over 8K bytes.

Where people like myself put several games or whatever on the one program then such information is critical. It is a little frustrating copying most of a program into the computer only to find there is insufficient space to complete it.

Now for a problem from the Fair goat department. I have a copy on tape of a game called Empire produced by Sega

Grandstand. It has an error in it. On finally achieving the status of Prime Minister you are not congratulated or anything like that, but told there is an ERROR. The problem is that at this stage the program is told to go to subroutine 4000 and there is no line 4000. Obviously something is missing!

Have you thought of having as part of the club a suggestion box with a reward system. If someone makes a really good suggestion that is usable either in the magazine or any of the software then they will get say a \$5.00 discount off their next software purchase. Might worth a try in order to get some feedback. Just a thought but if used would obviously qualify for the first discount voucher.

Keith Hovell, Dunedin

EDITOR'S REPLY

1. The best we can do is advise whether the program is only suitable for 32K.
2. Re Empire - refer to our answer to Jeremy Bennett
3. You'll notice our reward system on the first page ... and we pay in CASH!!

DEAR EDITOR

I have had my Sega for about a month but have not as yet joined the Users Club. I borrowed some magazines from a friend. I like the programs you print in them. I am writing to ask if you can help me with a problem I have with a cassette of mine - it's called 'The Young 'ns'. It doesn't give any instructions on how to play the game. It simply says "you are in a cabin, atmosphere is hot, visible items - bunk, exits east. If you go east you die. It then asks you if you want another game but you can't - the keyboard is disabled. If you could help me with this and send me a reply I would greatly appreciate it.

Ian Bilton

EDITOR'S REPLY

Unfortunately Ian, you forgot to include your address with your letter so I have not been able to contact you. The problem you have with the keyboard can be corrected if you send your tape to us for modification. For those readers who have purchased this game without hint-sheets, the clues are listed later in this magazine .. or alternatively send us your name and address and we'll send you a copy.

DEAR EDITOR

I am enquiring on how to operate my data recorder for my computer. It says I need a 16K or 32K cartridge, I've got a 26K, would that matter? It also says to have your tone on high and I haven't got a tone dial. My data recorder is a Euromatic C630.

John Chambers, Russell

EDITOR'S REPLY

The cartridge you have is a 32K which uses a certain amount of memory to run the computer which leaves you with 26K. As with the Sega dataset the Euromatic tone is automatically set. Side two of most cassettes is recorded at the correct level for both these machines.

DEAR EDITOR

Five to six months ago I wrote to the magazine with one or two "minor complaints" but no answer has been printed. My comments covered the programs published in the magazine requesting that info be given to show whether or not they were suitable for the 16K, 32K and/or with the disk drive. I have the 16K cartridge and a disk drive and late last year spent hours typing a program only to find it would not work on the disk drive. This was the "Jet Ranger" page 20 Sept/Oct 1985 issue. I will however run it with my 16K cartridge.

I now have two further questions.

1. How is M. Howards book on Machine Code coming along?
2. How is the "Lightning Disk Basic" version coming along? (Refer page 19 Christmas issue 1985)

O A Scannell, Raumati Beach

EDITOR'S REPLY

1. Refer my answer to Keith Hovel
2. The machine code book should be published early next year!
3. See above for the improved disk BASIC.

DEAR EDITOR

RE R J Thorpe's question concerning Hu Cal Sort Function (May/June Letters to the Editor).

The answer to your question is quite simple. The "keys" are "the key to your sort". That is to say, they determine which column (A-IU) you wish the sort to be carried out on.

The examples below should make it clear:

1. This is a test table and is shown in ASCENDING order with reference to COLUMN A. Columns B and C show the christian and surnames of 5 people.
2. The test table has been sorted by one key (column A) in a DESCENDING order.
3. The test table has been sorted by one key (column B) in an ASCENDING order. (In order of christian names only).
4. The test table has been sorted by one key (column C) in an ASCENDING order. (In order of surnames only).
5. The test table has been sorted by two keys (key 1 = column B key 2 = column C) in an ASCENDING order. (In order of christian names first then by surnames).
6. The test table has been sorted by two keys (key 1 = column C key 2 = column B) in an ASCENDING order. (In order of surnames first then by christian names).

Note that when sorting by one key only and there are two or more entries that are the same, they are placed in the order that the sorting process finds them. Under experimentation, it first appeared that the sort was initiated from the bottom of the table but this does not appear to be constant.

To overcome this problem it is necessary to sort by two or three keys. This is shown in examples 5 and 6 where the names are sorted firstly by CHRISTIAN NAMES then SURNAMES (example 5) and then by SURNAMES followed by CHRISTIAN NAMES.

I hope that this will answer R J Thorpe's question. If not you may refer him to me (Selwyn Easton of the Pukekohe Users Group as listed in the magazine).

Selwyn Easton, Pukekohe

DEAR EDITOR

We look forward to each issue of your fascinating magazine. Please keep it up.

1. **Cat Danger** While my daughter and I were compiling a program her cat stalked into the room, tail rampart as usual when he thinks he owns the house. The tip of his tail touched the cartridge end of the Sega, which was on a low table, and in an instant a fortnights laborious programming completely vanished. Conclusion:- Table height should be at least 55cm if there are cats about.
2. Can you suggest why our SP400 printer sometimes runs out of steam a little way through a program and returns to origin and stops. (Sometimes it even does this with the test program). The only cure we have found when it is in this mood is to load "Easy Writer" and print two or three paragraphs. After that the printer behaves normally. Is this a common (or could it be the cat again?).
3. Enclosed is a Bar Graph program. You might say it's a long program for a short result. What we would really like to

continued on p. 31

KARATE

. . . Craig 'Yie Arrgghh' Martin

This program has to be one of the best programs we have ever published in the mag. It is fast, furious and a lot of fun.

This two player game has really great graphics, and puts you in command of a dangerous fighting warrior, you can control his kicks, jumps and punches etc.

The object is simple, murder the other bloke!

I think that the program will only work on the 32K Sega, or in conjunction with a SF-7000 but try it anyway!

A 16K version is available on tape from us

```
10 GOSUB 7000
20 REM
30 REM KARATE CRAIG MARTIN/1986
40 REM
50 SCREEN1,1:CURSOR13,23:PRINT"PRESS FIRE"
60 IFSTRIG(1)ORSTRIG(2)>0THEN80
70 GOTO60
80 SCREEN2,2:K=50:K1=146
90 MAG3:S=0:S1=4:X=150:X1=122:X6=43:X7=43:X8=43:X9=43
100 SPRITE0,(150,150),0,1
110 SPRITE1,(122,150),4,6
120 FORI=1TO200:NEXT:COLOR15
130 SOUND4,1,15:CURSOR137,138:PRINT"BEGIN":SOUND0
140 FORI=1TO200:NEXT:BLINE(136,138)-(180,144),,BF
150 REM PLAYING STANCES
160 REM
170 Y1=150:SPRITE1,(X1,Y1),S1,6
180 ONSTICK(1)GOTO240,190,370,190,410,190,450,190
190 ONSTRIG(1)GOTO530,1460,2120
200 Y=150:SPRITE0,(X,Y),S,1
210 ONSTICK(2)GOTO300,220,390,220,430,220,470,220
220 ONSTRIG(2)GOTO670,810,2480
230 GOTO170
240 IFS>8THENS=S-40:GOTO200
250 Y=134:FORU=1TO4:F=STRIG(1):G=STICK(2)
260 IFG=7ANDS1<=8THENX1=X1-5
270 IFG=5ANDS1<8THENS1=S1+40
280 ONFGOTO1210,1690,1940
290 SPRITE0,(X,Y),S+40,1:SPRITE1,(X1,Y1),S1,6:NEXT:GOTO200
300 IFS1>8THENS1=S1-40:GOTO170
310 Y1=134:FORU=1TO4:F=STRIG(2):G=STICK(1)
320 IFG=7ANDS<8THENX=X-5
330 IFG=5ANDS<8THENS=S+40
340 ONFGOTO1330,1820,2030
350 IFF=2THEN1820
360 SPRITE1,(X1,Y1),S1+40,6:SPRITE0,(X,Y),S,1:NEXTU:GOTO170
370 IFS<8THENX=X+5
380 GOTO200
390 IFS1<8THENX1=X1+5
400 GOTO170
410 S=S+40:IFS>44THENS=S-40
420 GOTO200
430 S1=S1+40:IFS1>44THENS1=S1-40
440 GOTO170
450 IFS<8THENX=X-5
460 GOTO200
470 IFS1<8THENX1=X1-5
480 GOTO170
490 IFS=40THEN950
500 REM
510 REM SNAP KICK HEAD (BLACK,LEFT)
520 REM
530 IFS>8THEN950
540 IFS=4THENX=X-16
```

**\$20
PRIZE!**

```

550 SPRITE0,(X,Y),16,1
560 IFSTICK(2)=5THENS1=S1+40:IFS1>44THENS1=S1-40
570 IFSTICK(2)=7ANDS1=4THENS1=28
580 SOUND4,0,10:SPRITE1,,S1,6:SPRITE0,(X,Y),8,1:XX=X-X1:IFS1>8THEN630
590 IFS1=0THEN620
600 IFXX<=6ANDXX>=-5THENSOUND4,2,15:X6=X6-2:GOSUB3360
610 GOTO630
620 IFXX<=28ANDXX>=20THENSOUND4,2,15:X6=X6-2:GOSUB3360
630 SOUND0:SPRITE0,(X,Y),16,1:S=0:IFS1=28THENS1=4
640 GOTO200
650 REM      SNAP KICK HEAD (RED,LEFT)
660 REM
670 IFS1>8THEN1040
680 IFS1=4THENX1=X1-16
690 SPRITE1,(X1,Y1),16,6
700 IFSTICK(1)=5THENS=S+40:IFS>44THENS=S-40
710 IFSTICK(1)=7ANDS=4THENS=28
720 SOUND4,0,10:SPRITE1,(X1,Y1),8,6:XX=X-X1:SPRITE0,,S,1:IFS>8THEN770
730 IFS=0THEN760
740 IFXX<=4ANDXX>=-5THENSOUND4,2,15:X8=X8-2:GOSUB3380
750 GOTO770
760 IFXX>=-29ANDXX<=-18THENSOUND4,2,15:X8=X8-2:GOSUB3380
770 SOUND0:SPRITE1,(X1,Y1),16,6:S1=0:IFS=28THENS=4
780 GOTO170
790 REM      SNAP KICK HEAD (RED,RIGHT)
800 REM
810 IFS1>8THEN1130
820 IFS1=0THENX1=X1+16
830 SPRITE1,(X1,Y1),20,6
840 IFSTICK(1)=5THENS=S+40:IFS>44THENS=S-40
850 IFSTICK(1)=3ANDS=0THENS=24
860 SOUND4,0,10:SPRITE1,(X1,Y1),12,6:XX=X-X1:SPRITE0,,S,1:IFS>8THEN910
870 IFS=0THEN900
880 IFXX<=28ANDXX>=19THENSOUND4,2,15:X8=X8-2:GOSUB3380
890 GOTO910
900 IFXX>=-2ANDXX<=7THENSOUND4,2,15:X8=X8-2:GOSUB3380
910 SOUND0:SPRITE1,(X1,Y1),20,6:S1=4:IFS=24THENS=0
920 GOTO170
930 REM      LOW KICK (BLACK,LEFT)
940 REM
-950 IFS=44THENX=X-16
-960 SOUND4,0,10:SPRITE0,(X,Y),48,1:XX=X-X1:IFS1=0ORS1=40THEN990
-970 IFXX<=15ANDXX>=-2THENSOUND4,2,15:X6=X6-1:GOSUB3360
980 GOTO1000
990 IFXX<=30ANDXX>=15THENSOUND4,2,15:X6=X6-1:GOSUB3360
1000 SOUND0:S=40:GOTO200
1010 REM
1020 REM      LOW KICK (RED,LEFT)
1030 REM
-1040 IFS1=44THENX1=X1-16
-1050 SOUND4,0,10:SPRITE1,(X1,Y1),48,6:XX=X-X1:IFS=0ORS=40THEN1080
-1060 IFXX>=-15ANDXX<=0THENSOUND4,2,15:X8=X8-1:GOSUB3380
1070 GOTO1090
1080 IFXX>=-30ANDXX<=-13THENSOUND1,2,15:X8=X8-1:GOSUB3380
1090 SOUND0:S1=40:GOTO170
1100 REM
1110 REM      LOW KICK (RED,RIGHT)
1120 REM
-1130 IFS1=40THENX1=X1+16
-1140 SOUND4,0,10:SPRITE1,(X1,Y1),52,6:XX=X-X1:IFS=0ORS=40THEN1170
-1150 IFXX>=14ANDXX<=29THENSOUND4,2,15:X8=X8-1:GOSUB3380
1160 GOTO1180
1170 IFXX<=14ANDXX>=-1THENSOUND4,2,15:X8=X8-1:GOSUB3380
1180 SOUND0:S1=44:GOTO170
1190 REM
1200 REM JUMPING SIDE KICK (BLACK,LEFT) REM
1210 IFSTICK(2)=5THENS1=S1+40:IFS1>44THENS1=S1-40
1220 IFSTICK(2)=7ANDS1=4THENS1=28
1230 SPRITE1,,S1,6
-1240 SOUND4,0,10:X=X-10:SPRITE0,(X,Y-8),56,1:XX=X-X1:IFS1>8THEN1290
-1250 IFS1=0THEN1280
-1260 IFXX<=5ANDXX>=-5THENSOUND4,2,15:X6=X6-6:GOSUB3360

```

```

1270 GOTO1290
1280 IFXX<=29ANDXX>=18THENSOUND4,2,15:X6=X6-6:GOSUB3360
1290 FORI=1TO20:NEXT: SOUND0:S=0: IFS1=28THENS1=4
1300 GOTO200
1310 REM
1320 REM JUMPING SIDE KICK (RED,LEFT) REM
1330 IFSTICK(1)=5THENS=S+40: IFS>44THENS=S-40
1340 IFSTICK(1)=7ANDS=4THENS=28
1350 SPRITE0,,S,1
1360 SOUND4,0,10:X1=X1-10: SPRITE1,(X1,Y1-8),56,6:XX=X-X1: IFS>8THEN1410
1370 IFS=0THEN1400
1380 IFXX<=5ANDXX>=-7THENSOUND4,2,15:X8=X8-6:GOSUB3380
1390 GOTO1410
1400 IFXX>=-29ANDXX<=-18THENSOUND4,2,15:X8=X8-6:GOSUB3380
1410 FORI=1TO20:NEXT: SOUND0:S1=0: IFS=28THENS=4
1420 GOTO170
1430 REM
1440 REM SNAP KICK HEAD (BLACK,RIGHT)
1450 REM
1460 IFS>8THEN1610
1470 IFS=0THENX=X+16
1480 SPRITE0,(X,Y),20,1
1490 IFSTICK(2)=5THENS1=S1+40: IFS1>44THENS1=S1-40
1500 IFSTICK(2)=3ANDS1=0THENS1=24
1510 SOUND4,0,10: SPRITE1,(X1,Y1),S1,6: SPRITE0,(X,Y),12,1:XX=X-X1: IFS1>8THEN1560
1520 IFS1=0THEN1550
1530 IFXX<=-18ANDXX>=-26THENSOUND4,2,15:X6=X6-2:GOSUB3360
1540 GOTO1560
1550 IFXX<=3ANDXX>=-4THENSOUND4,2,15:X6=X6-2:GOSUB3360
1560 SOUND0: SPRITE0,(X,Y),20,1:S=4: IFS1=24THENS1=0
1570 GOTO200
1580 REM
1590 REM LOW KICK (BLACK,RIGHT)
1600 REM
1610 IFS=40THENX=X+16
1620 SOUND4,0,10: SPRITE0,(X,Y),52,1:XX=X-X1: IFS1=0ORS1=40THEN1650
1630 IFXX<=-14ANDXX>=-29THENSOUND4,2,15:X6=X6-1:GOSUB3360
1640 GOTO1660
1650 IFXX>=-14ANDXX<=1THENSOUND4,2,15:X6=X6-1:GOSUB3360
1660 SOUND0:S=44:GOTO200
1670 REM
1680 REM JUMPING SIDE KICK BLACK,RIGHT1532 REM
1690 IFSTICK(2)=5THENS1=S1+40: IFS1>44THENS1=S1-40
1700 IFSTICK(2)=3THENS1=24
1710 SPRITE1,,S1,6
1720 SOUND4,0,10:X=X+10: SPRITE0,(X,Y-8),60,1:XX=X-X1: IFS1>8THEN1770
1730 IFS1=0THEN1760
1740 IFXX>=-29ANDXX<=-18THENSOUND4,2,15:X6=X6-6:GOSUB3360
1750 GOTO1770
1760 IFXX>=-8ANDXX<=4THENSOUND4,2,15:X6=X6-6:GOSUB3360
1770 FORI=1TO20:NEXT: SOUND0:S=4: IFS1=24THENS1=0
1780 GOTO200
1790 REM
1800 REM JUMPING SIDE KICK RED,RIGHT
1810 REM
1820 IFSTICK(1)=5THENS=S+40: IFS>44THENS=S-40
1830 IFSTICK(1)=3ANDS=0THENS=24
1840 SPRITE0,,S,1
1850 SOUND4,0,10:X1=X1+10: SPRITE1,(X1,Y1-8),60,6:XX=X-X1: IFS>8THEN1900
1860 IFS=0THEN1890
1870 IFXX<=29ANDXX>=18THENSOUND4,2,15:X8=X8-6:GOSUB3380
1880 GOTO1900
1890 IFXX<=8ANDXX>=-4THENSOUND4,2,15:X8=X8-6:GOSUB3380
1900 FORI=1TO20:NEXT: SOUND0:S1=4: IFS=24THENS=0
1910 GOTO170
1920 REM SOMERSAULT (BLACK)
1930 REM
1940 U=79:Y3=0:X3=0:X2=X-10:DI=4: IFS=0THENDI=-4:U=63:X2=X+10
1950 FUSION(X2,Y),0,0
1960 FORI=-180TO0STEP12
1970 Y3=SIN(RAD(I))*30
1980 X3=X3+DI:U=U+1

```

```

1990 SPRITE0,(X3,Y3),U,1
2000 NEXT:POSITION(0,0),0,0:X=X+DI*15:GOTO200
2010 REM SOMERSAULT (RED)
2020 RE.1
2030 U1=79:Y5=0:X5=0:X4=X1-10:DI=4:IFS1=0THENDI=-4:U1=63:X4=X1+10
2040 POSITION(X4,Y1),0,0
2050 FORI=-180TO0STEP12
2060 Y5=SIN(RAD(I))*30
2070 X5=X5+DI:U1=U1+1
2080 SPRITE1,(X5,Y5),U1,6
2090 NEXT:POSITION(0,0),0,0:X1=X1+DI*15:GOTO170
2100 REM SPINNING KICK (BLACK,LEFT)
2110 REM
2120 X=X-4:IFS=4ORS=44THENX=X-16
2130 XX=X-X1:IFXX<-18THEN2300
2140 FORQ=0TO1:F0RW=100TO104STEP4
2150 IFSTICK(2)=5THENS1=S1+40:IFS1>44THENS1=S1-40
2160 IFSTICK(2)=7ANDS1=4THENS1=28
2170 SPRITE1,,S1,6
2180 SPRITE0,(X,Y),W,1:NEXTW,Q
2190 SPRITE0,,108:SPRITE3,(X-16,Y),112,1:SOUND4,0,10:IFS1>8THEN2240
2200 IFS1=0THEN2230
2210 IFXX<=14ANDXX>=4THENSOUND4,2,15:X6=X6-5:GOSUB3360
2220 GOTO2240
2230 IFXX<=36ANDXX>=25THENSOUND4,2,15:X6=X6-5:GOSUB3360
2240 FORT=1TO40:NEXT:SOUND0:SPRITE3,,,0:IFS=4ORS=44THENX=X+16
2250 IFS1=28THENS1=4
2260 GOTO200
2270 REM
2280 REM SPINNING KICK (BLACK,RIGHT)
2290 REM
2300 X=X+12
2310 XX=X-X1
2320 FORE=0TO1:F0RR=120TO124STEP4
2330 IFSTICK(2)=5THENS1=S1+40:IFS1>44THENS1=S1-40
2340 IFSTICK(2)=3ANDS1=0THENS1=24
2350 SPRITE1,,S1,6
2360 SPRITE0,(X,Y),R,1:NEXTR,E
2370 SPRITE0,(X+8,Y),128:SPRITE3,(X+40,Y),132,1:SOUND4,0,10:IFS1>8THEN2420
2380 IFS1=0THEN2410
2390 IFXX>=-45ANDXX<=-32THENSOUND4,2,15:X6=X6-5:GOSUB3360
2400 GOTO2420
2410 IFXX>=-21ANDXX<=-10THENSOUND4,2,15:X6=X6-5:GOSUB3360
2420 FORT=1TO40:NEXT:SOUND0:SPRITE3,,,0:IFS=4ORS=44THENX=X+16
2430 IFS1=24THENS1=0
2440 GOTO200
2450 REM
2460 REM SPINNING KICK (RED,LEFT)
2470 REM
2480 X1=X1-4:IFS1=4THENX1=X1-16
2490 XX=X-X1:IFXX>0THEN2660
2500 FORQ=0TO1:F0RW=100TO104STEP4
2510 IFSTICK(1)=5THENS=S+40:IFS>44THENS=S-40
2520 IFSTICK(1)=7ANDS=4THENS=28
2530 SPRITE1,(X1,Y1),W,6
2540 SPRITE0,,S,1:NEXTW,Q
2550 SPRITE1,,108:SPRITE3,(X1-16,Y1),112,6:SOUND4,0,10:IFS>8THEN2600
2560 IFS=0THEN2590
2570 IFXX>=-14ANDXX<=-4THENSOUND4,2,15:X8=X8-5:GOSUB3380
2580 GOTO2600
2590 IFXX>=-36ANDXX<=-25THENSOUND4,2,15:X8=X8-5:GOSUB3380
2600 FORT=1TO40:NEXT:SOUND0:SPRITE3,,,0:IFS1=4THENX1=X1+16
2610 IFS=28THENS=4
2620 GOTO170
2630 REM
2640 REM SPINNING KICK (RED,RIGHT)
2650 REM
2660 X1=X1+12
2670 XX=X-X1
2680 FORE=0TO1:F0RR=120TO124STEP4
2690 IFSTICK(1)=5THENS=S+40:IFS>44THENS=S-40
2700 IFSTICK(1)=3ANDS=0THENS=24

```

```

2710 SPRITE0,(X,Y),S,1
2720 SPRITE1,(X1,Y1),R,6:NEXTR,E
2730 SPRITE1,(X1+8,Y1),128:SPRITE3,(X1+40,Y1),132,6:SOUND4,0,10:IFS>8THEN2780
2740 IFS=0THEN2770
2750 IFXX<=45ANDXX>=32THENSOUND4,2,15:X8=X8-5:GOSUB3380
2760 GOTO2780
2770 IFXX<=21ANDXX>=10THENSOUND4,2,15:X8=X8-5:GOSUB3380
2780 FORT=1TO40:NEXT:SOUND0:SPRITE3,,,0:IFS1=4THENX1=X1+16
2790 IFS=24THENS=0
2800 GOTO170
2810 REM
2820 REM PICTURE LAYOUT
2830 REM
2840 SCREEN2,1:CLS:COLOR1,15,(0,0)-(255,191),4:B=192:T=0
2850 FORV=1TO10:T=T+8:A=A+5:B=B+5:FORI=ATOBSTEP11:CURSORI,T:COLOR1:PRINTCHR$(206)
2860 COLOR1,7,(55,90)-(248,110)
2870 LINE(0,10)-(48,90),1
2880 LINE(10,28)-(10,92),1
2890 LINE(22,48)-(22,95),1
2900 LINE(35,71)-(35,102),1
2910 LINE(0,85)-(50,110),3
2920 LINE(200,3)-(255,90),1
2930 LINE(0,3)-(200,3),1
2940 LINE(48,90)-(255,125),1,B
2950 LINE(0,110)-(255,111),1,B
2960 LINE(151,110)-(151,125),1
2970 CIRCLE(65,117),3,15,,,BF
2980 CIRCLE(80,117),3,15,,,BF
2990 CIRCLE(95,117),3,15,,,BF
3000 CIRCLE(161,117),3,15,,,BF
3010 CIRCLE(176,117),3,15,,,BF
3020 CIRCLE(191,117),3,15,,,BF
3030 PAINT(10,100),3
3040 PAINT(250,0),4
3050 COLOR1,3,(0,125)-(255,191)
3060 COLOR1,14,(50,110)-(255,124)
3070 COLOR1,3,(0,110)-(46,191)
3080 LINE(6,140)-(43,147),1,BF
3090 LINE(6,170)-(43,177),6,BF
3100 LINE(151,127)-(55,191),14
3110 LINE(151,127)-(255,191),14
3120 PAINT(60,191),14
3130 CURSOR2,130:COLOR1:PRINT"STAMINA"
3140 CURSOR2,160:COLOR6:PRINT"STAMINA"
3150 LINE(48,110)-(48,191),1
3160 CURSOR107,114:COLOR6:PRINT"POINTS"
3170 CURSOR205,114:COLOR1:PRINT"POINTS"
3180 CURSOR75,97:COLOR1:PRINTCHR$(17);"KARATE CHAMPS";CHR$(16)
3190 M=122:A=5:FORI=1TO8:M=M+A:A=A+1:BLINE(60,M)-(255,M):NEXTI
3200 COLOR1,15,(232,130)-(237,135)
3210 CURSOR225,130:PRINTCHR$(210)
3220 CURSOR225,138:PRINTCHR$(211)
3230 CURSOR233,130:PRINTCHR$(212)
3240 CURSOR233,138:PRINTCHR$(213)
3250 COLOR1,15,(73,130)-(79,135)
3260 CURSOR70,130:PRINTCHR$(214)
3270 CURSOR70,138:PRINTCHR$(215)
3280 CURSOR78,130:PRINTCHR$(216)
3290 CURSOR78,138:PRINTCHR$(217)
3300 BLINE(100,127)-(200,146),,BF
3310 COLOR1,11,(135,137)-(170,145)
3320 LINE(135,145)-(168,145),3
3330 CURSOR138,128:COLOR1:PRINTCHR$(208);SPC(2);CHR$(208)
3340 CURSOR138,128:COLOR8:PRINTCHR$(209);SPC(2);CHR$(209)
3350 RETURN

```

```

3360 BLINE(X6,170)-(X7,177),,BF:X7=X6:IFX6<7THEN3420
3370 RETURN
3380 BLINE(X8,140)-(X9,147),,BF:X9=X8:IFX8<7THEN3560
3390 RETURN
3400 REM      WINNING OF A POINT   BLACK
3410 REM
3420 SOUND0:SPRITE1,(X1-10,Y1+20),32,6
3430 SPRITE3,,,0
3440 K1=K1+15:CIRCLE(K1,117),3,1,,,,BF
3450 F=9:Y=142
3460 L=X1+15:IFX<X1-10THENL=X1-45
3470 FORI=1TO20
3480 F=F*-1:BEEP
3490 SPRITE0,(L,Y+F),36,1:SOUND0:NEXT
3500 LINE(6,170)-(43,177),6,BF
3510 LINE(6,140)-(43,147),1,BF
3520 IFK1=191THENC$="BLACK":C1$="RED":GOTO3680
3530 GOTO90
3540 REM      WINNING OF A POINT   RED
3550 REM
3560 SOUND0:SPRITE0,(X,Y+20),32,1
3570 SPRITE3,,,0
3580 K=K+15:CIRCLE(K,117),3,6,,,,BF
3590 F1=9:Y1=142
3600 L=X+15:IFX>X1-8THENL=X-35
3610 FORI=1TO20
3620 F1=F1*-1:BEEP
3630 SPRITE1,(L,Y1+F1),36,6:NEXT
3640 LINE(6,140)-(43,147),1,BF
3650 LINE(6,170)-(43,177),6,BF
3660 IFK=95THENC$="RED":C1$="BLACK":GOTO3680
3670 GOTO90
3680 SCREEN1,1:CLS:COLOR15,4
3690 CURSOR5,15:PRINT"DO YOU WANT REVENGE ";C1$;"?"
3700 CURSOR10,10:PRINT"WINNER = ";C$
3710 FORI=1TO20
3720 IFINKEY$="Y"THEN3820
3730 IFINKEY$="N"THEN10
3740 NEXT
3750 CURSOR10,10:PRINT"
3760 FOR I=1TO20
3770 IFINKEY$="Y"THEN3820
3780 IFINKEY$="N"THEN10
3790 NEXT
3800 GOTO3700
3810 CLS:END
3820 GOSUB8000
3830 GOTO50
7000 GOTO9920
7001 SCREEN2,1:CLS:COLOR15,1,(0,0)-(255,191),4:RESTORE:COLOR4
7010 CURSOR70,2:PRINTCHR$(17);"WELCOME TO";CHR$(16)
7020 CURSOR40,95:COLOR7:PRINT"THIS GAME IS FOR 2 PLAYERS ONLY"
7030 CURSOR65,107:COLOR3:PRINT"JOYSTICKS MUST BE USED"
7040 FORI=0TO16
7050 READT,T1,T2,T3:LINE(T,T1-20)-(T2,T3-20),15,BF
7060 NEXT
7070 FORI=0TO18
7080 READT4,T5,T6,T7:LINE(T4,T5-20)-(T6,T7-20),15
7090 NEXT
7100 FORI=0TO6
7110 READT8,T9:PAINT(T8,T9-20),15
7120 NEXT
7130 LINE(15,82)-(250,90),14,BF
7140 LINE(15,14)-(250,22),14,BF
7150 BLINE(15,85)-(250,87),,BF
7160 BLINE(15,17)-(250,19),,BF
7161 MAG3:SPRITE0,(80,132),8,15
7163 SPRITE1,(40,132),128,15
7164 SPRITE3,(142,132),52,15
7165 SPRITE4,(160,110),56,15
7166 CURSOR72,133:COLOR15:PRINTCHR$(218)
7170 SCREEN2,2:COLOR15

```

```

7180 COLOR10:CURSOR100,180:PRINT"PRESS FIRE"
7190 FORK=1T0100000
7200 FORI=1T015
7210 COLOR1,6,,1
7220 IFSTRIG(1)ORSTRIG(2)>0THEN8000
7230 NEXTI,K
7240 DATA 20,50,27,92,62,64,69,92,69,71,83,78,83,64,90,92,104,50,111,92,111,50,1
25,57,111,71,125,78,125,57,132,71
7250 DATA 146,64,153,92,153,71,167,78,167,64,174,92,180,50,215,57,194,57,201,92,
224,50,250,57,224,57,232,92,232,85,250,92,232,67,242,74,27,71,48,50,27,78,55,50,
31,75,48,92,34,71,55,92,48,50,55,50,48,92,55,92,62,64,76,50,69,64,76,57,76,57,83
,64,76,50,90,64
7260 DATA 118,78,125,92,125,78,132,92,125,50,132,57,125,78,132,71,125,92,132,92,
146,64,160,50,153,64,160,57,160,57,167,64,160,50,174,64,49,51,49,91,76,53,119,79
,130,72,129,56,160,53
8000 SCREEN1,1:CLS:COLOR15,4
8010 T$="Do you want instructions (Y/N)"
8020 FORI=1TOLEN(T$):SOUND1,700,15:T1$=MID$(T$,I,1)
8030 IFT1$=" "THENSOUND0:NEXT
8040 CURSORI+2,6:PRINTT1$
8050 SOUND0:NEXT
8060 IFINKEY$="Y"THEN8090
8070 IFINKEY$="N"THEN8160
8080 GOTO8060
8090 CLS:PRINTTAB(10);"INSTRUCTIONS"
8100 PRINTTAB(10);""
8110 CURSOR0,2:PRINT"SNAP KICK : PUSH FIRE 1 TO KICK TO THELEFT AND FIRE 2 TO KI
CK TO THE RIGHT."
8120 CURSOR0,5:PRINT"LOW KICK : FIRST YOU MUST BE BOBBING DOWN (PUSH JOYSTICK D
OWN) THEN PUSH FIRE 1 TO KICK TO THE LEFT AND FIRE 2 TO KICK TO THE RIGHT."
8130 CURSOR0,10:PRINT"JUMPING SIDE KICK : FIRST YOU MUST BE JUMPING (PUSH JOYSTI
CK UP) THEN PUSH FIRE 1 TO KICK TO THE LEFT AND FIRE 2 TO KICK TO THE RIGHT."
8140 CURSOR0,15:PRINT"BACK SPINNING KICK : PUSH FIRE 1 AND FIRE 2 TOGETHER TO K
ICK (REGARDLESS OFYOUR DIRECTION)."

```

SEGA NEW ZEALAND . . . IS CROSSING THE TASMAN

Grandstand Computer Ltd has now passed its support for SEGA to SEGA SOFTWARE SUPPORT . . . that's us. We in New Zealand have rested on our laurels far too long and now we're crossing the Tasman bringing

- our renowned user magazine SEGA COMPUTER
- all our famous Kiwi software



Now you will be able to subscribe direct to SEGA COMPUTER magazine or simply collect it direct from your local Sega user group. We are also looking throughout Australia for quality contributions of software programs, user tips, reviews and comments to include in our magazine . . . And for Australian professional software writers, we are able to market your software here to our list of almost 4000 SEGA owners. And the list is growing daily. Just send us your name and address and we'll send you a sample magazine and our catalogue — FREE OF CHARGE.

We look forward to hearing from you. You'll certainly hear more from us.


SEGA SOFTWARE SUPPORT, P.O. BOX 10-207, Auckland, 4, New Zealand. Phone NZ (9) 603-274

BASE PATCH

... by
TREVOR YANN

```
10 CLS:E=0
20 PRINT"          SEGA BASE PATCH PROGRAM":PRINT
25 PRINT"          by Trevor Yann"
27 PRINT
30 PRINT" This program will alter a disk"
40 PRINT" containing the Sega Base program so"
50 PRINT" that any printer can be connected to"
60 PRINT" the centronics printer port."
70 PRINT:PRINT
80 PRINT" Insert Sega Base system disk and"
90 PRINT" press <CR>."
100 T$="*":C=10
110 A$=INKEY$
120 IFA$=CHR$(13) THEN 170
130 IFE=1 THEN IFA$(">") THEN PRINT CHR$(8):END
140 C=C+1:IF C<5 THEN 110
150 PRINT T$;C=0:IFT$="*" THEN T$=CHR$(8):GOTO 110
160 T$="*":GOTO 110
170 PRINT CHR$(8);:BEEP
180 TR=0:SC=1
190 DSKI$ TR,SC;A$(0),0,128;A$(1),128,128
200 IF LEFT$(A$(0),14)(">") THEN BEEP 2:PRINT:PRINT" This is not a Sega
Base system disk.":PRINT:GOTO 80
210 PRINT:PRINT" Updating disk"
220 TR=0:SC=10
230 DSKI$ TR,SC;A$(0),0,128;A$(1),128,128
240 BT=&HBB
250 NW$=CHR$(&HOD)+CHR$(&H28)+CHR$(&H05)+CHR$(&HFE)+CHR$(&HOA)+CHR$(&HC2)+CHR$(&
HD3)+CHR$(&H09)+CHR$(&H3E)+CHR$(&HOA)
260 NW$=NW$+CHR$(&HCD)+CHR$(&HE5)+CHR$(&H09)+CHR$(&H3E)+CHR$(&HOD)+CHR$(&HCD)+CH
R$(&HE5)+CHR$(&H09)+CHR$(&HC3)+CHR$(&HF3)+CHR$(&H09)
270 LN=LEN(NW$)
280 A$(INT(BT/128))=LEFT$(A$(INT(BT/128)),BTMOD128)+NW$+RIGHT$(A$(INT(BT/128)),1
28-BTMOD128-LN)
290 DSKO$ TR,SC;A$(0),0,128;A$(1),128,128
300 BEEP:E=1
310 PRINT" Disk updated":PRINT
320 PRINT" Press <cr> to update another disk,"
330 PRINT" or any other key to end the program."
340 GOTO 100
```

YOUNG'S HINT SHEET

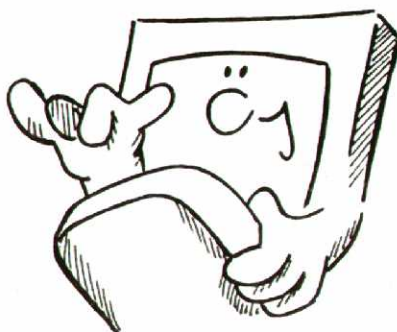

LOOK
I (Inventory)
GO
GET
EXAM
WEAR
PUSH
HOLD
PULL
OPEN
TAPE
FIX
BREAK
CUT

INSERT
EAT
READ
SAY
CLIMB
THROW
MAKE
COOK
BUY
LIGHT
RUB
HELP
SHOOT
UNLIGHT

Use these words in conjunction with words used in the adventure. To start you off try getting up on the bunk and examining it. The space suit could be of benefit. From there on it's up to you!

GOOD LUCK!!!!

- For some time now rumours have been about that Sega (Japan) have been setting up shop in Australia after the collapse of the John Sands Sega operation. Australian and New Zealand Sega owners felt that at last they were going to get some support from the company itself. They were going to bring out new computers and new games galore ... now we have just heard that Sega are moving out again. They blame it on the strength of the Yen and the downturn in the Australian economy which makes their products more difficult to sell.

However, they have released several 'new' cartridge games (including Flicky!!) reported to be selling at \$AUS 39.95 (\$NZ 49.95). What will happen from now is anybody's guess but Australians in particular are feeling a bit low now that there is no major company supporting the Sega in Australia.

- Here in New Zealand we seem to have revived the spirits of many Sega owners with our direct marketing and enthusiastic support for Sega. Many new products will appear in our catalogue.

- Sega Control Stations (ie. disk drive units) are still in short supply but we are still able to source supplies for members... however, stocks are definitely low!

- 3 inch disks for disk drives are in world wide shortage due to the popularity of Amstrad and Sega. If you see any at your local shop 'grap them quick' as prices are rising fast! This is the reason that disk based software such as Aerobat are taking so long to come through.

- Australians are taking a big interest in our User Club with the magazine now being posted to over 500 Sega enthusiasts in Australia.

- The Sega computer has been sold in significant numbers to countries as diverse as the USA, Iceland, Switzerland and Italy. One attraction is that the keyboard is 'multilingual' and the cartridge games are available for immediate satisfaction. We are definitely interested in any overseas Sega contacts you may have.

- One ongoing problem that all cassette tape software has is that it can be erratic in loading. This has always been a problem and comes from a mismatch between the recording on one data recorder and the reading from another. Tape quality is a problem also. All the suppliers of software do their best to provide good quality tape and recording but... gremlins can get into the works.

If you have problems loading a commercial tape purchased from us then simply send the tape back and another will be forwarded.

- Sega computer groups are springing up all over the country and even being revived. They are excellent value for all beginners (and even further on) and provide good, enthusiastic ongoing support for the computer. See our list at the back of the magazine for your local club or even put your name forward for your area. There is no doubt that working together helps all.

- We are working hard to try and get some of the more complex machine code games onto disk. In forthcoming magazines we will advise you of new releases.

- The new Sega joystick, although small, is rugged and reliable and has found favour amongst our members... so we have heard.

- We at Sega Software Support have been inundated with letters and enquiries since the last magazine and catalogue. We are working our way steadily through these so if your enquiry is a little delayed it isn't because you have been ignored - it is because we are working our way to the bottom of the heap.

- The GREAT SEGA IS SUPREME Competition is outlined elsewhere in the magazine. Take advantage of it NOW.

The Survey Form MUST be returned AND you MUST be a member to be eligible for the GRAND PRIZE DRAW.

Note that membership also entitles you other discounts as well - in fact, two membership offers are available this issue.



NEWS & REVIEWS

SEGA SPEECH PROCESSOR

by PETER BIGGS

This is one of the more interesting add-ons for the Sega. Although expensive it offers a huge range of additional functions your computer can perform and 'stun and amaze' the family.

The Speech Processor comes in a sleek black plastic box which includes a speaker, a volume control, a Centronics (large) port (for an 80 column printer), a stereo output, an external 8 Ohm speaker output and two switches for on/off and standby. The unit is powered directly from the mains.

The ribbon cable plugs into the Centronics port of the SF-7000 Control Station. An interesting feature is that an 80 column printer can then be run from the speech processor and the peripheral not needed can be switched off.

A small program in the documentation needs to be typed in to get the feel of the speech processor.

The speech system works by means of "allophones" or parts of speech. These allow a user to join these together to make

words or phrases. 59 speech allophones and 5 pauses are available.

The sound is obtained by 'printing' to the Centronics port with LPRINT CHR\$(xx) where xx is an ASCII code.

One immediate use is that it could be used to speak instructions while a menu is being displayed or used in conjunction with a game.

I found it easy to use, especially with the small program. Constructing words became easy once I got the idea that words are sounds and I virtually ignored the spelling.

The speech is 'robotic' sounding like a Dalek - in fact my favourite word is Exterminate!

User Tronic Developments have produced a solid product that is very useful for the Sega.

The Speech Processor is available through Sega Software Support at \$235



A Word on Club Membership ...

If you have a Sega computer and you don't have Club Membership then you are missing out on many offers such as the above. Every Club member has the opportunity to gain more than their membership fee in savings throughout the year. We guarantee this!

The Sega Computer magazine, which is **FREE** with Club Membership, keeps you in touch with the latest news of products - both software and hardware - and useful reviews, articles and programs. Our Club members tell us that it's definitely worth the extra!

The Sega User Club Membership until September 30 1986 is \$40.09 (incl. \$3.09 GST). Membership subscriptions received on or after October 1 1986 will be \$40.70 (incl. \$3.70 GST).

EXTRA

For 1986-87 we offer a **FREE** copy of **COMPUTERS DON'T BYTE** with every Club Subscription

10 REM FACE

20 REM

30 REM

40 REM This Program Draws A Face on the Screen. That's all... But it's

50 REM A Face worth seeing!

60 REM -----

70 REM

80 SCREEN2,1:COLOR,1,,1:CLS

90 FORX=1TO45:READ A,B,C:LINE(A,B)-(C,B),15:NEXT

100 DATA100,101,102,100,102,104,101,103,104,108,103,114,100,104,115,99,105,116,99,106,117,97,107,117,97,108,116,98,109,100

110 DATA103,109,107,104,110,106,111,110,112,105,111,106,105,112,106,109,112,110,115,112,118,99,113,102,104,113,106,109,113,111,113,113,117

120 DATA98,114,106,108,114,117,97,115,117,97,116,117,98,117,117,98,118,116,98,119,106,109,119,116,99,120,104,109,120,116

130 DATA99,121,104,110,121,115,99,122,105,108,122,116,99,123,105,112,123,116,100,124,107,109,124,115,100,125,105,109,125,114,102,126,112,103,127,112,104,128,110,105,129,109

140 PSET(100,100),15:PSET(110,102),15:PSET(100,112),15:PRESET(103,123),15

150 SCREEN2,2

160 GOTO160

FACE .. by Aaron Boulton

This little program simply draws a face on the screen - but it certainly is an interesting face!

TO QUALIFY FOR ENTRY TO THE 'SEGA IS SUPREME' COMPETITION ALL YOU NEED TO DO IS

* Be registered
as a member
of the Sega User Club
before October 10

* Return your
SEGA SURVEY SHEET
completed.

Your membership number
is your ticket in the draw
for these great prizes.

NOTE: All prizes drawn
under Police Supervision
on October 15 1986.

All prizewinners will be
contacted after this date and
the results published in the next issue.



THE PRIZES YOU COULD WIN ARE:

1st

Sega SF7000 Control Station
Valued at \$550, this disk drive unit really
makes using the Sega a breeze! No
longer will you need to bother with
cassette tapes. A very useful and
comprehensive manual comes with the
unit. You'll be delighted with this!

2nd

Sega Printer Plotter.
Valued at \$360, the Printer Plotter will
allow you to write letters, print graphs
and list your programs for convenient
checking. Great value.

3rd

Sega Speech Processor.
Valued at \$235, the Speech processor
from User Tronics will introduce you to
another world ... speech from your
computer. Even your friends will be
astonished at your good fortune.

4th

Software of your choice from our
catalogue to the value of \$100.
A chance to expand your software
collection ... at no cost!

MEMBERSHIP ONLY OFFER

And even if you don't win one of these prizes
we can still offer you a good deal! These are
just some of our great value bargains for
members.

THESE PRICES ARE VALID ONLY UNTIL
SEPTEMBER 29. AFTER THIS DATE ALL
PRICES WILL INCREASE BY 10% WITH
GST!



A Special MEMBER ONLY offer of 3 games cartridges
of your choice from the Sega Software Support
Catalogue for \$65 (p&h free)



SUPREME SEGA GAMES - We have just received a
few!!! of the following outstanding Sega games
cartridges:

ORGUSS FLICKY
CHAMPIONSHIP BOXING

These are all quite quite superb and cost \$30 each
(incl. p&h). These will be available to MEMBERS
ONLY - ONE PER MEMBER - in order of receipt of
your Sega Survey Sheet. Please indicate your order of
preference on the SEGA SURVEY SHEET as the
cartridge you want may be sold out.

**IMPORTANT NOTE: THIS OFFER IS GOOD
ONLY WHILE STOCKS LAST! ACT
NOW... AS THESE CARTRIDGES WILL
NEVER BE AVAILABLE AGAIN.**

If stocks are exhausted we will return your
money IN FULL.

Dear Sega User..

We are pleased to offer you an invitation to join our **SEGA USERS CLUB**. Membership of this club provides many exclusive benefits throughout the year including the bi-monthly **SEGA COMPUTER** magazine, crammed full of useful information for beginners and advanced programmers. The six issues will build up throughout the year to become a fully comprehensive manual, which will enable absolute beginners to programming to learn step-by-step how to operate the computer, and its software, with clear explanations issue by issue of all the programming commands and statements. Contributors like Mike Howard and others continue to make the magazine the first source of good information about Sega.

Advanced programmers will benefit from information about programming in machine code as they discover that working with **SEGA's** remarkable Sprite and Sound capabilities is well within their grasp.

Letters are published and questions answered in order that everyone can learn from each other's discoveries and problems, with many many program listings for games and utility programs to type in yourself.

New hardware and software releases are reviewed so that members are right up-to-date on what is available; how it works and just as soon as it is available; in order that you can make full use of your computer. We also encourage local area meetings by publishing dates and meetings for anyone wishing to start or go along to a local User Group.

A regular feature of the User Club's magazine **SEGA COMPUTER** is to offer selected software titles at discount prices. Through the year, every club member who takes advantage of these special offers will more than recoup his or her Club subscription fee.

If you would like to become a member and receive the above benefits, all you need to do is send us your payment for \$40.09 (includes \$3.09 GST) before September 30 1986. After this date the subscription is \$40.70 (incl. \$3.70 GST).

Also, if you know someone who has a SEGA computer and is not a club member, send us their name and address ... and we will send them this invitation also.


Our guarantee is that you will be 100% satisfied with the Club. If you are not for any reason, we will immediately refund your subscription on a pro rata basis.

We greatly value all our members, both old and new, and are dedicated to ensuring that everyone is capable of making the fullest use of their SEGA computer.

This issue of **SEGA COMPUTER** magazine is being sent to all Sega owners on our mailing list to show you the value of belonging to the Sega User Club. Your Club Subscription will ensure that you will continue receiving this valuable magazine and the benefits of club membership. Act now and don't miss out.

Yours sincerely

Glenys Millington

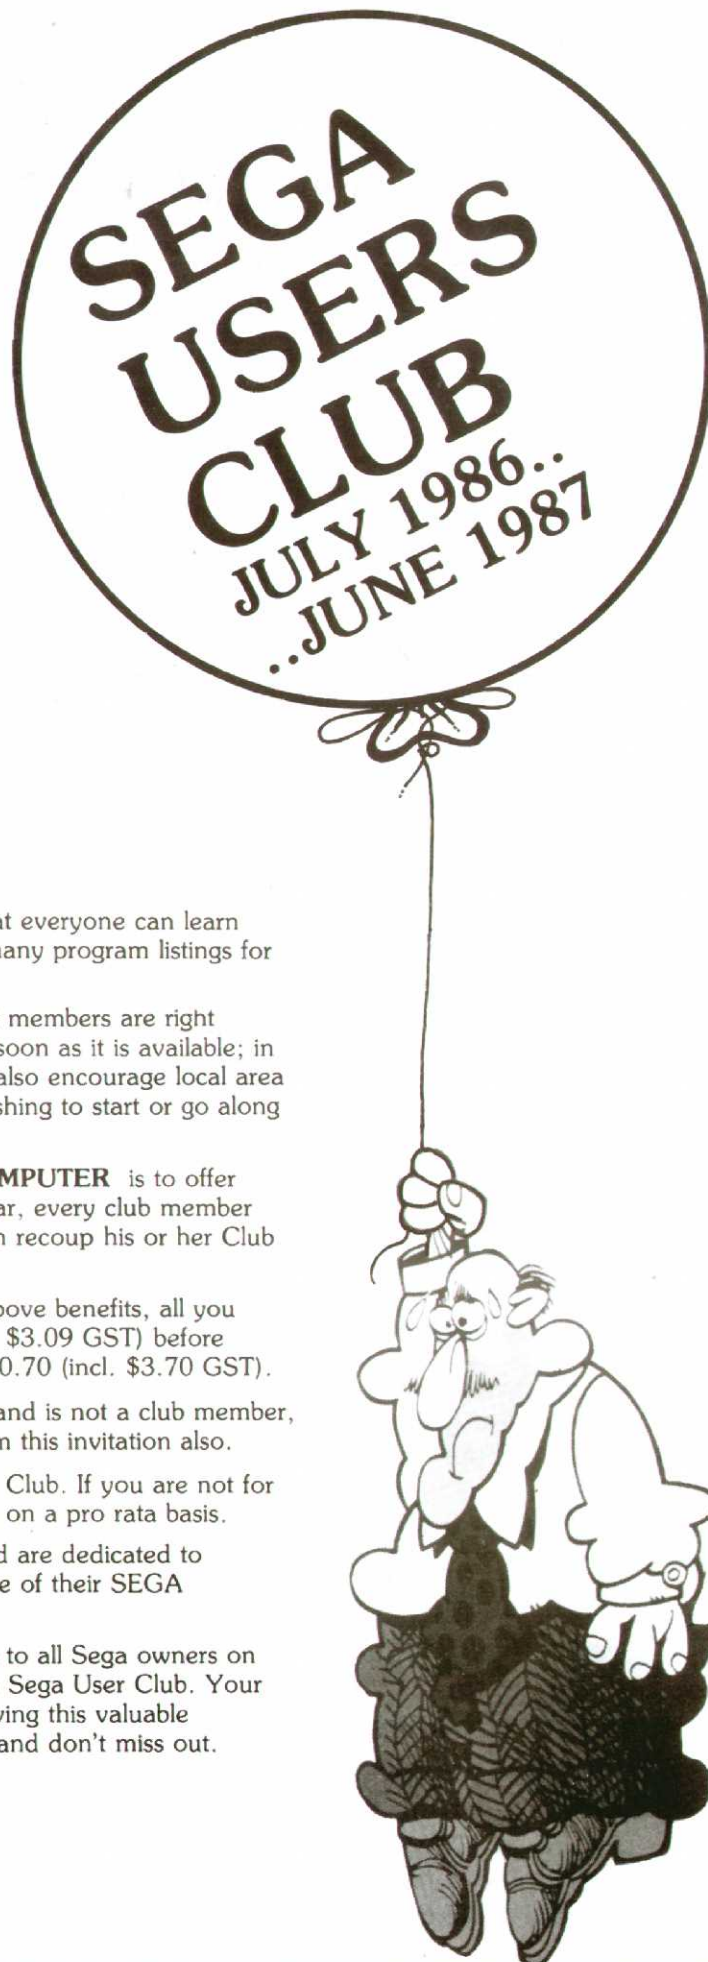

Pages 17 and 18 missing

WORD PROCESSING

WITH YOUR SEGA COMPUTER ... by Selwyn Easton

In this article I will attempt to cover the basic requirements for Word Processing with your SEGA computer and review the four Word Processing programs currently available.

WORD PROCESSING

Word Processing basically involves the use of a micro-processor, with its' memory, disk drives, monitor and other associated devices, to create and manipulate text. During the creation of a document the text can be saved on disk or tape and when the user is satisfied with the format of the text it can be printed on paper via the printer port of the computer.

The use of high density disks means that many hundreds or thousands of pages of information and correspondence can be stored in a single small package.

The basic requirements for Word Processing with your Sega are:

1. Your SC-3000 or 3000H
2. A Data Recorder or SF-7000 Super Control Station.
3. A Printer.
4. A Word Processing Program.

The SC-3000H is more desirable because of its' typewriter like keyboard but if you are not a fast typist then the SC-3000 will suffice.

An SF-7000 Super Control Station is also desirable because of its' speed in saving and loading documents. It also has a dedicated centronics printer port which means a centronics printer can be used without the use of an interface device as is required with just the SC-3000. Of course, the SP-400 printer can be used in either case.

The choice of your printer will ultimately dictate the quality of your finished text and for more serious uses an 80 column centronics printer with Near Letter Quality capability is ideal.

To the best of my knowledge there are only four Word Processing programs currently available for Sega. Two are available in cassette only, one in both cassette and disk and the other also as a cartridge. The following are reviews on above mentioned programs and in each case I have written the review using the respective program. They are all available through Sega Software Support.

32K WORD PROCESSOR

by Grandstand Leisure Products.

This is a cassette based Word Processor written for the BASIC LEVEL IIIB cartridge. Like all cassette based programs it is slow to load and if you were unsuccessful with loading for the first time repeated attempts would become frustrating.

Once the program is loaded the user has approximately 15K Bytes of memory for documents. The user is presented with a 10 option menu as follows.

- 0) Change document name.
- 1) View a document.
- 2) Enter a document.
- 3) List document titles.
- 4) Delete a document.
- 5) Search a document.

- 6) Print a document.
- 7) SAVE all documents.
- 8) LOAD a document.
- 9) Edit a document.

Each of the 10 options has instructions and options within themselves. Most are reasonably self explanatory, although I was left confused by some of the results.

Under the SEARCH option I was given three more options:

- 1) Search all documents for a keyword.
- 2) Search for and replace a word in a document.
- 3) Return to the main menu.

Option 1) returned a list of documents and their names in which the keyword was found.

Option 2) did what it said, although if the word being searched for was a single letter, it would replace all those letters with the replacement word. This produced an undesired result at a remarkable speed. I found the feature useful but had to be careful when using it.

The PRINT option offered a variety of prompts. These included options for Page headings; Justification of text to right hand margin; Single or multiple page document; Numbering of multiple pages; Number of Lines per page and finally an option to review all of the above. The only option that was missing was that that would allow the use of an 80 column printer via an interface in the printer/plotter port on your SC-3000 computer.

SAVING all documents was simple and well presented. A prompt to ready the user and insert title were given and on commencement of saving the familiar * Saving Start indicator was printed on the screen. The documents were saved in two parts on the tape and on completion of saving a VERIFICATION prompt was presented. When this was completed, the main menu was presented again. I was using a SEGA SR-1000 Dataset and had no difficulties in SAVING and VERIFYING documents.

LOADING files was easily accomplished too.

EDITING DOCUMENTS was a little more difficult than expected. Basic entry was easy but when shifting blocks of text was required, I found it to be impossible. Block erasement was easily done. Caps lock, centring of text and cursor homing were provided.

A formatting function that almost worked was handy. It failed to format correctly when the beginning of a word was more than 5 characters from the end of the line. These words had to be formatted manually. Also while the formatting was turned ON and the cursor was moved up and down the text a disturbing form of formatting took place. I was unable to work out what this was actually trying to achieve and so made a point of turning formatting OFF when scrolling text.

Having a reasonable machine code content it is fast in performing it's task and for the \$14:00 price tag is hardly over-priced. However, it falls short of even being close to the ideal Word Processing package, for reasons outlined above, but as there are few Word Processing packages available for your SEGA it would suffice until a satisfactory replacement is found.

EASY WRITER 16K OR 32K

by Grandstand Leisure Products

This is the baby brother to the 32K Word Processor. It is almost identical in it's operation but has a shortened Options List and similarly cut down set of functions within those options. It can handle only one document in memory at any given time and I found that documents created with the 32K only Word Processor were not compatible with this, even though memory space was available. It too is currently available at the cost of \$14:00 and like Big Brother is far from ideal.

STOP PRESS!

The programs in this issue are now available on tape for \$14.00 (incl. p&h). After Sept 30th ... \$15.40. Order from Sega Software Support.

"BASWORD" BY MATE SOFTWARE LTD 1986

This program is available in both a cassette and disk based version, with the files written by either program being fully compatible with the other. I began writing this article using the cassette version but soon opted to use the disk. This was simply achieved by saving my text on cassette, changing my IIIB cartridge for the SF-7000 Disk Drive, loading the Basword Disk and finally choosing the cassette option, under the format command, so I could load my text from the cassette saved file. This may sound rather long and tedious but was completed within a few minutes. The only disturbing part of this procedure was that upon Saving the original text, there was no means of Verifying it. The thought of relying on a 'single save', without verification, appeared a little optimistic. In this case my fears of losing data were unwarranted.

The first really striking aspect of this program is the format that it takes. By this I refer to its 'Line Numbering' action. This is the first hurdle to overcome if you have used using other Word Processors. There is a BEEP 2 warning when you reach two characters from the end of the line and a slight pause as wordwrap to the next line is performed. The BEEP 2 can be quite disconcerting and if you have nimble fingers, several characters can be missed during the wordwrap.

There are 28 valid commands in Basword and a break-down sheet of their functions is supplied in the package. Included in the disk version were three 'notes' files giving notes and hints for the user. These were clearly understandable but when printed on paper some symbols and characters did not appear as they did on screen. This is because they are not part of the Standard Character Set of most printers, yet are part of the Sega character set. It was pleasing to see within the notes an invitation to contact the author for additional information if printer problems were experienced. As well as this invitation, there were program change notes to enable the user to set the disk version to print with the SEGA SP-400 printer (it is supplied ready to drive a dot matrix printer via the parallel port of the SF-7000).

All the editing commands were easy to use and most were fast in their execution (Delete, Copy and Move blocks of text). Those that were slow were real slow. These involved Searching the text for a word or phrase to be changed or deleted and the search was archaically slow due to a SEARCH WRITTEN IN BASIC. Adjusting of text, to suit your line length was also slow and had to be carried out in paragraph blocks to prevent the facility from removing paragraph markings. Although this was true it was still better than adjusting lines manually. The Justify to right hand margin was also very slow but made the presentation of a document much neater. I found the insertion of new lines was not notably slower than other program as it 'shifted text down' to accommodate.

The final function of a Word Processor, of course, is to produce paper copies of your document and Basword will give most people more than enough printing options. I have a STAR SG-10 printer that is capable of Near Letter Quality and many other facilities, and while I was satisfied with the options Basword offered, I was not able to utilise all the desired facilities my printer has. Of course, you must consider that the current price of this printer is greater than the cost of my SC-3000 and SF-7000 collectively. It would still have been nice to be able to use its '2K byte buffer (Basword appears to dump only one line of text to the printer at a time), change character sets and use the printer underline facilities just to name a few. This however does not detract any desirability from the Basword program.

To conclude, I must say that on initial impression, I was sceptical about the performance of this program but as I became accustomed to its format and limitations I found it to be adequate. The program has good Word Processing functions but lacks the polish and speed required for a really good product. Priced at \$28.50 for the cassette and \$39.95 for the disk I do not consider it to be over-priced but as stated, find it lacking in some respects.

SEGAWORD 3 BY TREVOR YANN

Segaword 3 is one of a series of three Word Processor programs written by Trevor Yann and is disk based. Segaword One and Two are the cassette and cartridge versions of the same program. All three programs were marketed by John Sands of Australia until the company folded.

The package is well presented, comes in a plastic case with a 30 page User's Manual. The manual is also well presented and indexed with examples of all functions. Also included in the manual are explanations of Error Messages and a table of Default Values. The disk version has 18 command functions, all selectable by pressing the CTRL key and the functions' associated key. One of these is a HELP page, and this page allows you to view the remaining 17 functions along with their Control Codes.

The program is not listable except for one line that calls a machine code address but judging by its' speed I would say it is probably very close to being 100% machine code.

There is no visible delay in wordwrap performance as with Basword and apparently no limitation on its' on screen justification (Justification to 38 characters) except the 38 character line length. The limit set on justification on Hardcopy is that set by the user setting margin tabs and ultimately by the maximum number of columns printable by your printer. No Justification to right hand margin is available but this could be considered as unnecessary.

Variable margins can be set within a document making it possible to have consecutive paragraphs or even lines within paragraphs different lengths.

There is no requirement to adjust text for line length as this is carried out automatically and instantly upon dumping to printer or using the Format function. The Format function allows you to view what the finished article will look like. If the printer line length is set greater than 38, then the cursor right, left and down keys must be used to view the full text.

Text manipulation was effortless and extremely fast. Block Move, Block Copy, and Block Delete are the main functions used here and a Full Screen Editor for Insertion, Deletion and Write Over all made their contribution to the finished product.

Reading and Writing files to and from disk was also easy and important files could be Write-Protected under BASIC. A Disk Write Error was returned if overwriting of a protected file was attempted. The only shortfall I found in the disk management was a View Files Facility. While this was true, it was possible to view the files on disk, without the current file in memory being lost, by pressing the Reset Key, viewing Files in the usual manner under BASIC, then Running the program again. If the Quit Processing function was used, the file in memory was lost.


File size was limited to 9991 bytes which is roughly equal to two fullscapt pages completely packed with text. As an indication, at this point in my review I now have 6700 bytes free and 5417 bytes still free on completion of this review. I consider this to be quite adequate remembering that 156K bytes of storage is available on the disk in the drive unit. Several files can realistically be used to complete a single long document. File merging is possible within the limits of memory availability.

Other functions included are Forced Page Break; Set Printer Control Codes; Kill Document In Memory; Reset Initial Options; Quit Processing; Move Cursor To Beginning Or End of Document; Search A Block Of Characters and of course Print A Document

The Search was simply a search for a word or phase and not search and replace. It was performed from where the cursor currently sat to the end of the document and fast was the only way to describe it.

The Print option allows the use of the Sega SP-400 or a Centronics printer. I used the centronics option and found that the buffer in my printer was utilised, making it possible to resume processing while the printer finished its' task.

To conclude I must say that I find Segaword 3 a pleasure to use and although it is the most expensive Word Processor, it is well worth the cost. It will soon be available through Sega Software Support.

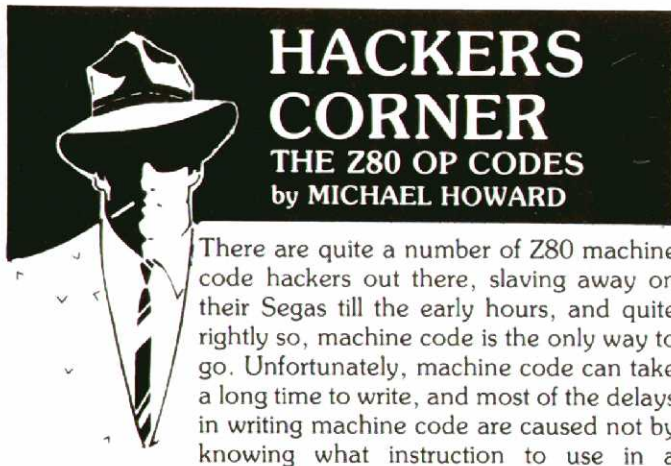

particular instance, but what the code number is for an instruction. So being a thoughtful type of bloke, I decided to list ALL the instructions below, so now you have a quick reference chart for Z80 opcodes.

I mentioned ALL the Z80 opcodes, well that is not quite correct. When Zilog produced the Z80, they actually created about 90 other commands, mostly involving the IX and IY registers, they even included another type of shift. Unfortunately, these instructions did not get published, but they do exist, and next month I will show all of them, and how to use them.

Thought for the month: The program you want is always on the other side of the Disc or Tape!!

| Code | Hex | Z80 assembler | - after CBh |
|------|-----|---------------|-------------|
| 0 | 00 | nop | rlc b |
| 1 | 01 | ld bc,NN | rlc c |
| 2 | 02 | ld (bc),a | rlc d |
| 3 | 03 | inc bc | rlc e |
| 4 | 04 | inc b | rlc h |
| 5 | 05 | dec b | rlc l |
| 6 | 06 | ld b,N | rlc (hl) |
| 7 | 07 | rlca | rlc a |
| 8 | 08 | ex af,af' | rrc b |
| 9 | 09 | add hl,bc | rrc c |
| 10 | 0A | ld a,(bc) | rrc d |
| 11 | 0B | dec bc | rrc e |
| 12 | 0C | inc c | rrc h |
| 13 | 0D | dec c | rrc l |
| 14 | 0E | ld, c,N | rrc (hl) |
| 15 | 0F | rrca | rrc a |
| 16 | 10 | djnz DIS | rl b |
| 17 | 11 | ld de,NN | rl c |
| 18 | 12 | ld (de),a | rl d |
| 19 | 13 | inc de | rl e |
| 20 | 14 | inc d | rl h |
| 21 | 15 | dec d | rl l |
| 22 | 16 | ld d,N | rl (hl) |
| 23 | 17 | rla | rl a |
| 24 | 18 | jr DIS | rr b |
| 25 | 19 | add hl,de | rr c |
| 26 | 1A | ld a,(de) | rr d |
| 27 | 1B | dec de | rr e |
| 28 | 1C | inc e | rr h |
| 29 | 1D | dec e | rr l |
| 30 | 1E | ld e,N | rr (hl) |
| 31 | 1F | rra | rr a |
| 32 | 20 | jr nz,DIS | sla b |
| 33 | 21 | ld hl,NN | sla c |
| 34 | 22 | ld (NN),hl | sla d |
| 35 | 23 | inc hl | sla e |
| 36 | 24 | inc h | sla h |
| 37 | 25 | dec h | sla l |
| 38 | 26 | ld, h,N | sla (hl) |
| 39 | 27 | daa | sla a |
| 40 | 28 | jr z,DIS | sra b |
| 41 | 29 | add hl,hl | sra c |
| 42 | 2A | ld hl,(NN) | sra d |
| 43 | 2B | dec hl | sra e |
| 44 | 2C | inc l | sra h |
| 45 | 2D | dec l | sra l |
| 46 | 2E | ld, l,N | sra (hl) |
| 47 | 2F | cpl | sra a |
| 48 | 30 | jr nc,DIS | |
| 49 | 31 | ld sp,NN | |
| 50 | 32 | ld (NN),a | |

| Code | Hex | Z80 assembler | - after CBh | - after EDh |
|------|-----|---------------|-------------|-------------|
| 51 | 33 | inc sp | | |
| 52 | 34 | inc (hl) | | |
| 53 | 35 | dec (hl) | | |
| 54 | 36 | ld (hl),N | | |
| 55 | 37 | scf | | |
| 56 | 38 | jr c,DIS | srl b | |
| 57 | 39 | add hl,sp | srl c | |
| 58 | 3A | ld a,(NN) | srl d | |
| 59 | 3B | dec sp | srl e | |
| 60 | 3C | inc a | srl h | |
| 61 | 3D | dec a | srl l | |
| 62 | 3E | ld a,N | srl (hl) | |
| 63 | 3F | ccf | srl a | |
| 64 | 40 | ld b,b | bit 0,b | in b,(c) |
| 65 | 41 | ld b,c | bit 0,c | out (c),b |
| 66 | 42 | ld b,d | bit 0,d | sbc hl,bc |
| 67 | 43 | ld b,e | bit 0,e | ld (NN),bc |
| 68 | 44 | ld b,h | bit 0,h | neg |
| 69 | 45 | ld b,l | bit 0,l | retn |
| 70 | 46 | ld b,(hl) | bit 0,(hl) | im 0 |
| 71 | 47 | ld b,a | bit 0,a | ld i,a |
| 72 | 48 | ld c,b | bit 1,b | in c,(c) |
| 73 | 49 | ld c,c | bit 1,c | out (c),c |
| 74 | 4A | ld c,d | bit 1,d | adc hl,bc |
| 75 | 4B | ld c,e | bit 1,e | ld bc,(NN) |
| 76 | 4C | ld c,h | bit 1,h | |
| 77 | 4D | ld c,l | bit 1,l | reti |
| 78 | 4E | ld c,(hl) | bit 1,(hl) | |
| 79 | 4F | ld c,a | bit 1,a | ld r, a |
| 80 | 50 | ld d,b | bit 2,b | in d,(c) |
| 81 | 51 | ld d,c | bit 2,c | out (c),d |
| 82 | 52 | ld d,d | bit 2,d | sbc hl,de |
| 83 | 53 | ld d,e | bit 2,e | ld (NN),de |
| 84 | 54 | ld d,h | bit 2,h | |
| 85 | 55 | ld d,l | bit 2,l | |
| 86 | 56 | ld d,(hl) | bit 2,(hl) | im 1 |
| 87 | 57 | ld d,a | bit 2,a | ld a,i |
| 88 | 58 | ld e,b | bit 3,b | in e,(c) |
| 89 | 59 | ld e,c | bit 3,c | out (c),e |
| 90 | 5A | ld e,d | bit 3,d | adc hl,de |
| 91 | 5B | ld e,e | bit 3,e | ld de,(NN) |
| 92 | 5C | ld e,h | bit 3,h | |
| 93 | 5D | ld e,l | bit 3,l | |
| 94 | 5E | ld e,(hl) | bit 3,(hl) | im 2 |
| 95 | 5F | ld e,a | bit 3,a | ld a, r |
| 96 | 60 | ld h,b | bit 4,b | in h,(c) |
| 97 | 61 | ld h,c | bit 4,c | out (c),h |
| 98 | 62 | ld h,d | bit 4,d | sbc hl,hl |
| 99 | 63 | ld h,e | bit 4,e | ld (NN),hl |
| 100 | 64 | ld h,h | bit 4,h | |
| 101 | 65 | ld h,l | bit 4,l | |

| Code | Hex | Z80 assembler | - after CBh | - after EDh | Code | Hex | Z80 assembler | - after CBh | - after EDh |
|------|-----|---------------|-------------|-------------|------|-----|--------------------------------|-------------|-------------|
| 102 | 66 | ld h,(hl) | bit 4,(hl) | | 168 | A8 | xor b | res 5,b | ldd |
| 103 | 67 | ld h,a | bit 4,a | rrd | 169 | A9 | xor c | res 5,c | cpd |
| 104 | 68 | ld l,b | bit 5,b | in l,(c) | 170 | AA | xor d | res 5,d | ind |
| 105 | 69 | ld l,c | bit 5,c | out (c),l | 171 | AB | xor e | res 5,e | outd |
| 106 | 6A | ld l,d | bit 5,d | adc hl,hl | 172 | AC | xor h | res 5,h | |
| 107 | 6B | ld l,e | bit 5,e | ld de,(NN) | 173 | AD | xor l | res 5,l | |
| 108 | 6C | ld l,h | bit 5,h | | 174 | AE | xor (hl) | res 5,(hl) | |
| 109 | 6D | ld l,l | bit 5,l | | 175 | AF | xor a | res 5,a | |
| 110 | 6E | ld l,(hl) | bit 5,(hl) | | 176 | B0 | or b | res 6,b | ldir |
| 111 | 6F | ld l,a | bit 5,a | rld | 177 | B1 | or c | res 6,c | cpir |
| 112 | 70 | ld (hl),b | bit 6,b | | 178 | B2 | or d | res 6,d | inir |
| 113 | 71 | ld (hl),c | bit 6,c | | 179 | B3 | or e | res 6,e | otir |
| 114 | 72 | ld (hl),d | bit 6,d | sbc hl,sp | 180 | B4 | or h | res 6,h | |
| 115 | 73 | ld (hl),e | bit 6,e | ld (NN),sp | 181 | B5 | or l | res 6,l | |
| 116 | 74 | ld (hl),h | bit 6,h | | 182 | B6 | or (hl) | res 6,(hl) | |
| 117 | 75 | ld (hl),l | bit 6,l | | 183 | B7 | or a | res 6,a | |
| 118 | 76 | halt | bit 6,(hl) | | 184 | B8 | cp b | res 7,b | lddr |
| 119 | 77 | ld (hl),a | bit 6,a | | 185 | B9 | cp c | res 7,c | cpdr |
| 120 | 78 | ld a,b | bit 7,b | in a,(c) | 186 | BA | cp d | res 7,d | indr |
| 121 | 79 | ld a,c | bit 7,c | out (c),a | 187 | BB | cp e | res 7,e | otdr |
| 122 | 7A | ld a,d | bit 7,d | adc hl,sp | 188 | BC | cp h | res 7,h | |
| 123 | 7B | ld a,e | bit 7,e | ld sp,(NN) | 189 | BD | cp l | res 7,l | |
| 124 | 7C | ld a,h | bit 7,h | | 190 | BE | cp (hl) | res 7,(hl) | |
| 125 | 7D | ld a,l | bit 7,l | | 191 | BF | cp a | res 7,a | |
| 126 | 7E | ld a,(hl) | bit 7,(hl) | | 192 | C0 | ret nz | set 0,b | |
| 127 | 7F | ld a,a | bit 7,a | | 193 | C1 | pop bc | set 0,c | |
| 128 | 80 | add a,b | res 0,b | | 194 | C2 | jp nz,NN | set 0,d | |
| 129 | 81 | add a,c | res 0,c | | 195 | C3 | jp NN | set 0,e | |
| 130 | 82 | add a,d | res 0,d | | 196 | C4 | call nz,NN | set 0,h | |
| 131 | 83 | add a,e | res 0,e | | 197 | C5 | push bc | set 0,l | |
| 132 | 84 | add a,h | res 0,h | | 198 | C6 | add a,N | set 0,(hl) | |
| 133 | 85 | add a,l | res 0,l | | 199 | C7 | rst 0 | set 0,a | |
| 134 | 86 | add a,(hl) | res 0,(hl) | | 200 | C8 | ret z | set 1,b | |
| 135 | 87 | add a,a | res 0, | | 201 | C9 | ret | set 1,c | |
| 136 | 88 | adc a,b | res 1,b | | 202 | CA | jp z,NN | set 1,d | |
| 137 | 89 | adc a,c | res 1,c | | 203 | CB | | set 1,e | |
| 138 | 8A | adc a,d | res 1,d | | 204 | CC | call z,NN | set 1,h | |
| 139 | 8B | adc a,e | res 1,e | | 205 | CD | call NN | set 1,l | |
| 140 | 8C | adc a,h | res 1,h | | 206 | CE | adc a,N | set 1,(hl) | |
| 141 | 8D | adc a,l | res 1,l | | 207 | CF | rst 8 | set 1,a | |
| 142 | 8E | adc a,(hl) | res 1,(hl) | | 208 | D0 | ret nc | set 2,b | |
| 143 | 8F | adc a,a | res 1,a | | 209 | D1 | pop de | set 2,c | |
| 144 | 90 | sub b | res 2,b | | 210 | D2 | jp nc,NN | set 2,d | |
| 145 | 91 | sub c | res 2,c | | 211 | D3 | out N,a | set 2,e | |
| 146 | 92 | sub d | res 2,d | | 212 | D4 | call nc,NN | set 2,h | |
| 147 | 93 | sub e | res 2,e | | 213 | D5 | push de | set 2,l | |
| 148 | 94 | sub h | res 2,h | | 214 | D6 | sub N | set 2,(hl) | |
| 149 | 95 | sub l | res 2,l | | 215 | D7 | rst 16 | set 2,a | |
| 150 | 96 | sub (hl) | res 2,(hl) | | 216 | D8 | ret c | set 3,b | |
| 151 | 97 | sub a | res 2,a | | 217 | D9 | exx | set 3,c | |
| 152 | 98 | sbc a,b | res 3,b | | 218 | DA | jp c,NN | set 3,d | |
| 153 | 99 | sbc a,c | res 3,c | | 219 | DB | in a,N | set 3,e | |
| 154 | 9A | sbc a,d | res 3,d | | 220 | DC | call c,NN | set 3,h | |
| 155 | 9B | sbc a,e | res 3,e | | 221 | DD | prefixes instructions using ix | set 3,1 | |
| 156 | 9C | sbc a,h | res 3,h | | 222 | DE | sbc a,N | set 3,(hl) | |
| 157 | 9D | sbc a,l | res 3,l | | 223 | DF | rst 24 | set 3,a | |
| 158 | 9E | sbc a,(hl) | res 3,(hl) | | 224 | E0 | ret po | set 4,b | |
| 159 | 9F | sbc a,a | res 3,a | | 225 | E1 | pop hl | set 4,c | |
| 160 | A0 | and b | res 4,b | ldi | 226 | E2 | jp po,NN | set 4,d | |
| 161 | A1 | and c | res 4,c | cpi | 227 | E3 | ex (sp),hl | set 4,e | |
| 162 | A2 | and d | res 4,d | ini | 228 | E4 | call po,NN | set 4,h | |
| 163 | A3 | and e | res 4,e | outi | 229 | E5 | push hl | set 4,l | |
| 164 | A4 | and h | res 4,h | | 230 | E6 | and N | set 4,(hl) | |
| 165 | A5 | and l | res 4,l | | 231 | E7 | rst 32 | set 4,a | continued |
| 166 | A6 | and (hl) | res 4,(hl) | | 232 | E8 | ret pe | set 5,b | on p. 31 |
| 167 | A7 | and a | res 4,a | | | | | | |

Bubble Trouble

... by Aaron Boulton

Aaron Boulton, the author of 'Bill's Basement' has done some really nifty programming to fit this simple yet addictive game into a few lines of code.

With the cursor keys you guide a bubble down a set of tubes which are different every time. You have precious little time to get to the end before a wall of water destroys you! It works on disk BASIC as well.

```
10 REM BUBBLE TROUBLE
20 REM =====
30 REM by Aaron Boulton
40 REM Auckland, 1986
50 REM
60 GOSUB 400
70 SCREEN2,2:CLS:MAGO:COLOR1,1,(0,0)-(255,191),1:COLOR,12,(0,150)-(255,191)
80 T=0:Z=1:W=30:B=60:SC=0:E=3:R=0:LINE(0,150)-(255,150),1
90 LINE(47,152)-(218,164),15,B
100 CURSOR50,155:COLOR1:PRINTCHR$(17);"BUBBLE TROUBLE";CHR$(16)
110 FORSA=110TO1000STEP40:SOUND1,SA,15:NEXT:SOUND0:BLINE(0,0)-(255,149),,BF:GOSU
B250
120 SC=SC+T*10:CURSOR66,170:PRINTCHR$(5)
130 COLOR1:CURSOR30,170:PRINT"SCORE:";:COLOR15:PRINTSC:COLOR1:CURSOR30,180:PRINT
"TIME :";:COLOR15:PRINTT
140 D=0:X=5:Y=R:Z=Z+1:T=100:IFZ>ETHENE=E+3:W=W-2
150 IFT<1THEN290
160 IFAS=CHR$(30)THENY=Y-3
170 IFAS=CHR$(31)THENY=Y+3
180 IFAS=CHR$(28)THENX=X+3
190 IFAS=CHR$(29)THENX=X-1
200 T=T-1:X=X+.5:Y=Y+.5:PATTERNS#0,"387CEE6F6FE7C38":SPRITE0,(X,Y),0,15:AS=INKE
Y$
210 CURSOR66,180:PRINTCHR$(5);T
220 IFVPEEK(INT((Y+4)/8)*256+INT((X+4)/8)*8+YMOD8)>0THEN320
230 PATTERNS#0,"3C7EF7FBFB7E3C00":IFX>246THENZ=Z+1:SPRITE0,,0,0:GOTO110
240 GOTO150
250 R=B+5:FORA=0TO205STEP50:FORQ=0TO3:LINE(A,B+Q)-(A+55,B+D+Q),15:LINE(A,(B+W-Q)
)-(A+55,(B+W+D-Q)),15:NEXT:B=B+D:D=INT(RND(1)*50-25)
260 IFB+D<2THENB=2:D=0
270 IFB+D>115THENB=115:D=0
280 NEXT:RETURN
290 PAINT(0,R),4
300 ER=15:OUT127,228:FORX=240TO255STEP3:OUT127,X:SOUND5,2,ER:ER=ER-3:NEXT:SOUND0
310 CURSOR30,140:COLOR15:PRINT"THE WATER DESTROYED YOUR BUBBLE":GOTO330
320 ER=15:OUT127,228:FORX=240TO255STEP3:OUT127,X:SOUND5,1,ER:ER=ER-3:NEXT:SOUND0
330 PATTERNS#0,"91520003C0004A89":FORER=1TO125:NEXT:SPRITE0,,0,0
340 BLINE(60,50)-(140,80),,BF:COLOR,15,(60,50)-(140,80):COLOR1
350 CURSOR65,53:PRINT"ANOTHER GO?":CURSOR65,70:PRINT"(Y/N)"
360 IFINKEY$=""THEN360
370 IFINKEY$="N"THENEND
380 IFINKEY$="Y"THEN70
390 GOTO360
400 CLS:PRINT:PRINT
420 COLOR 4
430 PRINT"    B U B B L E    T R O U B L E"
440 PRINT"    -----"
470 PRINT:PRINT
480 PRINT"You are one of those helpless little"
490 PRINT"Bubbles floating around in one of the"
500 PRINT"Worlds many pipelines. You must "
510 PRINT"complete each pipeline before the"
520 PRINT"time limit is up, or else You will":PRINT"get washed away."
530 PRINT:PRINT"Use the cursor keys to move your":PRINT "Bubble."
540 PRINT:PRINT:PRINT"          ANY KEY CONTINUES"
550 IFINKEY$=""THEN550
560 RETURN
```




Part 1 The SEGA Computer - AN OVERVIEW by Brian Brown

The SEGA SC3000 home computer is an excellent addition to the computer scene with information, good graphics and sound. This seeks to add to the growing knowledge of the internal workings of the SEGA, and in so doing, help others in their search for better and quicker ways of programming.

BASIC OPERATION PRINCIPLES

The SEGA computer can be represented as three main components,

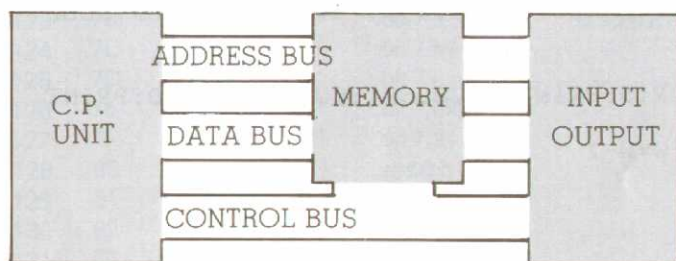

CENTRAL PROCESSING UNIT (CPU)

This device communicates with all the devices connected to it, and transfers information between the devices as required. This may involve the manipulation of the data internally within the CPU.

MEMORY

There are two types of memory used, Read Only and Random Access memory (ROM and RAM). The ROM contains the BASIC language (Beginners All-purpose Symbolic Instruction Code), and the necessary programs which enable the CPU to communicate with all the other devices. The contents of the ROM are retained when the power is turned off. ROM can only be Read by the CPU, and is a sort of text book from which the CPU gets the necessary instructions informing it of what to do. RAM is used for temporary program storage, and its contents disappear when the power is turned off. This explains why you must transfer your program to cassette tapes or disk. RAM can be thought of as a blackboard where information can be both written onto it and erased.

INPUT/OUTPUT DEVICES

These devices allow the user to communicate with the CPU and allows feedback from the CPU to the user. An example of an input/output device is the keyboard and Video Display.

COMMUNICATION BETWEEN DEVICES

Each device connected to the CPU is given a unique box number (ADDRESS). The CPU can communicate with the specific device by placing its box number (ADDRESS) on the ADDRESS BUS. A bus is a common highway which allows communication between devices. Having placed the right address on the bus, (ie. selected the correct box

number), the CPU can then read from or write to the selected device. The CPU transfers information between devices in BINARY format.

The smallest element in binary is a BIT. A bit is represented as having one of two possible states, ON or OFF. The ON state is normally designated '1' whilst the OFF state is designated at '0'.

The CPU however, can work with eight bits at a time. This group of eight bits is called a BYTE. A byte can be thought of as eight buckets, where each bucket could be full or empty. It thus follows that the maximum number of combinations possible with eight bits is 256. Each address (box) is capable of storing eight bits, thus any box can have as its contents a value of between 0 and 255.

The CPU moves the bytes around via the DATA BUS. In this case the DATA BUS is bidirectional, ie information can travel from the CPU to a device or from a device to the CPU. Each device is connected to the address bus which is used by the CPU to tell the device that the CPU can access any one of 65536 possible locations (or boxes which hold 8 bits each). To inform the devices as to which way the information is travelling on the data bus, a CONTROL BUS is used. This control bus informs the device if it should expect to receive data (ie a write) or whether it should present data so that the CPU can read it (ie a read). The CPU has temporary storage boxes inside it called REGISTERS. When the CPU wishes to transfer information from one address to another, the CPU carries out the following sequences:

1. Places the correct address (box number) on the address bus
2. Reads the contents of the selected address via the data bus
3. Transfers the information to one of its registers
4. Places the destination address on the address bus
5. Transfers the contents of its register onto the data bus
6. Informs the device at that address to get the new contents for that address, which is appearing on the data bus

INPUT/OUTPUT PORTS

The CPU can have up to 256 separate ports. These are selected by an eight bit value on the address bus, and the use of a special signal on the control bus. This special

signal is activated when you use the command OUT or INP in basic. These ports can each hold an eight bit value. Not all of the ports are used, so refer to the section dealing with the memory mapping arrangements for further information.

This covers the sequence of operations in a relatively simple manner, and has served to introduce the reader to some of the more technical terms which will be used shortly.

BINARY & DECIMAL

A byte of eight bits has already been introduced. These eight bits can be either on or off, so a byte in binary could be represented as follows:

```
B7 B6 B5 B4 B3 B2 B1 B0
1  1  1  0  1  0  1  1
```

Bit seven is the bit which has the greatest value, while bit zero has the least value. Bit seven is thus called the MOST SIGNIFICANT BIT (MSB) while bit zero is called the LEAST SIGNIFICANT BIT (LSB). In terms of the decimal value of each bit, the following example should help:

```
Decimal Value 128 64 32 16 8 4 2 1
Binary Digit  B7  B6 B5 B4 B3 B2 B1 B0
```

thus a byte of 11000000 will have a decimal value of 192, because bit 7 and bit 6 are both '1', so the decimal result is 128+64. Where a '1' occurs, the decimal value is added, while all '0's are ignored.

HEXADECIMAL NOTATION

Binary numbers of eight bits are sometimes tedious to write down, so a method was devised in which the binary numbers are represented in another form. This form is known as HEXADECIMAL (hex). It has a number base of 16 digits (decimal has 10, binary has two). The equivalent decimal, binary, and hex values are listed below:

| BINARY | DECIMAL | HEXADECIMAL |
|--------|---------|-------------|
| 0000 | 0 | 0 |
| 0001 | 1 | 1 |
| 0010 | 2 | 2 |
| 0011 | 3 | 3 |
| 0100 | 4 | 4 |
| 0101 | 5 | 5 |
| 0110 | 6 | 6 |
| 0111 | 7 | 7 |
| 1000 | 8 | 8 |
| 1001 | 9 | 9 |
| 1010 | 10 | A |
| 1011 | 11 | B |
| 1100 | 12 | C |
| 1101 | 13 | D |
| 1110 | 14 | E |
| 1111 | 15 | F |

As shown, hex ranges from 0 to F. When the hex number is larger, ie 16 in decimal then the hex number becomes 10. This is exactly the same as in decimal when you go from 9 to 10.

Looking at a byte (eight bits), the four least significant bits are called the LOWER NIBBLE, while the four most

significant bits are called the UPPER NIBBLE. (A nibble is 4 bits).

```
Upper Nibble      Lower Nibble
B7 B6 B5 B4      B3 B2 B1 B0
1  1  0  1      0  1  1  1  Binary value
                                     of each bit
```

To represent this in hex requires two hex digits, as each hex digit can only represent four bits. The upper and lower nibbles are converted to hex digits, with the resultant hex digits being written with the most significant one first. In the example above:

1101 in binary is '13' decimal so that's 'D' in hexadecimal
0111 in binary is '7' decimal so that's '7' in hexadecimal

so the corresponding hex digits which represent the byte 11010111 is 'D7'. Hexadecimal digits are prefixed with &H in SEGA basic, and the hexadecimal value of any decimal number can be found by using HEX\$.

NUMERIC VALUES

The same 'number' can be represented in many ways but our common method is called 'decimal' or base 10. Thus 423 is $4 \times (10 \times 10) + 2 \times 10 + 3 \times 1$

To denote different number bases, a number is preceded by B (for binary - base 2) or H (hex - base 16).

H1A7 is $1 \times (16 \times 16) + A \times 16 + (7 \times 1)$
ie $256 + 160 + 7$
ie 423 (decimal)

B110100111 is:
 $1 \times (2^8) + 1 \times (2^7) + 0 \times (2^6) + 1 \times (2^5) + 0 \times (2^4) + 0 \times (2^3) + (1 \times 2^2) + (1 \times 2) + 1$
ie 423 (decimal)
ie $256 + 128 + 32 + 4 + 2 + 1$

Generally, only hex and/or decimal conversions are required.

The program CONVERTER will convert to binary as well.

The SEGA computer has two main sections, **HARDWARE** and **SOFTWARE**. Hardware refers to the physical reality or components, whilst software refers to the programs which control the hardware.

HARDWARE: The hardware can be split into several main sections.

1. **CENTRAL PROCESSOR:** This is a Z80 8bit processor. It has a maximum address range of 65535 bytes. The first 32K is occupied by the Basic ROM or Games ROMs, while the other 32K is for RAM.

2. **VIDEO DISPLAY:** The Video Chip is a Texas Instruments TMM9929A. This provides up to four display modes, 32 sprites, 20 millisecond interrupt generator, and 16K bytes of dedicated RAM. The Video Ram has no connection to the central processor, and is updated by writing to the VDP. The VDP is port mapped and &HBE and &HBF. The internal structure of the VDP and its programming will be detailed later.

3. SOUND GENERATOR: This is an SN76487AN chip. It has three sound channels and a noise generator. Each channel has its own programmable attenuator for controlling the output volume. It is IC4 on the main PC board, and its programming in later on.

4. SYSTEM RAM: This is a 2Kbyte chip 8212 (IC3). It is memory mapped at address's &H0000 to &HC7FFF. It is used for stack and data storage by plug-in cartridges.

5. INPUT/OUTPUT DEVICES: These include the keyboard, printer, joy-sticks and cassette. The devices are connected to the computer system via a programmable interface chip, a 8255 PIA (IC5). This PIA has three ports and a control register. The information sent to the control register determines whether the ports will be read or write or both.

The ports are labelled as follows:

PORT A located at address &HDC Keyboard Matrix

PORT B located at address &HDD Keyboard Matrix

PORT C located at address &HDE Keyboard Control

PORT D located at address &HDF Control Register

The actual programming of this PIA will be covered in a later issue.

6. ADDRESS DECODER: This is achieved by IC2. A logic level of zero on the appropriate CS lead will enable that particular chip. Only one device may be enabled at any time. The CPU can only talk/listen to one device at a time, so it is the function of the address decoder to prevent more than one device interacting with the CPU at any moment.

INTERRUPTS: The SEGA computer operates with two interrupts. An interrupt is a halting of the process being carried out by the processor, a jump is then made to a specific program in memory, and when this program ends the original program is resumed.

NON-MASKABLE INTERRUPT (NMI): The interrupt causes the processor to jump to address &H0066. This occurs whenever the RESET button is pushed. A check is made of location &H97E2 which stores whether a program resides in memory, then the start-up routines are executed. The NMI cannot be disabled.

INTERRUPT (INT): This is used for TIME\$ and is generated by the VDP chip every 50 milli-seconds. It can be disabled by a DI (disable interrupts) command using machine-code. It must also be noted that the SEGA computer also uses Interrupt Mode 1, which forces INT to address &H0038.

THE SEGA MEMORY: The SEGA uses a Z80 microprocessor, thus has a maximum address range of 64K.

| | |
|---|--|
| 0000 ----- | All Basic programming packs occupy 0000 to 7FFF, and comprise not only ROM but also RAM is located at C000 to C7FF. There is NO onboard ROM! The Video RAM, keyboard, sound generator, and printer are all bank-selected using I/O ports. Game Cartridges use the system RAM chip located at C000 to C7FF which is the only memory which is on-board. RAM is always located in 7FFF to FFFF. |
| BASIC ROM or GAME CARTRIDGE | |
| 7FFF ----- | |
| RAM AREA | |
| FFFF ----- | |

INPUT/OUTPUT PORTS:

| | | |
|----|---------|----------------------------|
| 7F | SOUND | SN74689AN Sound Generator. |
| DC | PORT A | Keyboard Matrix |
| DD | PORT B | Keyboard Matrix |
| DE | PORT C | Keyboard Control |
| DF | CONTROL | PIA Intel 8255 |
| BE | VDP | TMM9929A VDG.(+ 16K VRAM) |
| BF | VDP | Other part of VDG |

FOUR COLOUR PRINTER/PLOTTER: The printer is run by a dedicated 8 bit micro-computer, type 6805. This CPU has the ROM built inside the actual chip, and thus, if it goes faulty, it must be thrown away. The mechanism is standard, and is used in a wide range of printers, eg. Sharp, Commodore, Casio, etc. Some parts are thus interchangeable.

SOFTWARE:

BASIC CARTRIDGES: the Basic cartridges (LVIII A/B). contain a 32K ROM chip and also RAM chips. The Basic operating system must use some of the RAM space for the storage of variables etc, (ie reserved Ram areas), thus this explains why only 26620 bytes are available to the user when using the level IIIB cartridge.

THE LEVEL IIIB CARTRIDGE: This contains a 32K ROM, 4 16Kx4bit RAM chips, and a few support chips.

GAMES: The games cartridges usually contain a single ROM chip. The on-board system RAM located at &HC000 is used for temporary storage of variables and the system stack. Some cartridges do use two ROM chips.

SEGA BASIC ROM: It occupies the first 32K of memory space. This leaves only 32K left for RAM. The Basic ROM contains the BASIC Language, and allows the user to program the computer using English type statements. The necessary routines to manage the keyboard, printer sound generator etc are all part of the BASIC Language. These routines may be called independently so that a programmer can use them as part of his own program. This is achieved by use of the CALL statement from BASIC.

RESERVED RAM AREAS : &H8000 - &H97FF

In order for Basic to convert data from one form to another, and to execute commands or run programs, it must reserve storage space for this purpose. The reserved Ram is also used to store pointers which hold the address or location of the program in memory, the data being used, variables and their values, what line number is being executed, the colour and cursor information, the character and sprite patterns, etc. Table XXX1 lists some relevant reserved locations.

BASIC PROGRAM POINTERS: Whenever a Basic program is typed in or RUN, the Basic Language in ROM must know where to locate the program, whereabouts the

program ends, where the variables are and what their names are, etc. Basic thus stores all this information in a Reserved RAM area, reserved because if this information is lost or destroyed, then the program will fail to execute properly, it at all. Each location in the Reserved RAM area holds a specific value, eg, memory locations &H8160 and &H8161 store the address of the start of a BASIC program. To determine the start address in hexadecimal, type the following:

BASIC LINE STORAGE FORMAT: When a line of Basic program is typed into the computer, it is stored in an area of designated free RAM. The way that each line is stored in memory is as follows:

| | |
|--------------------|---|
| Byte 1 | Number of bytes in the Line |
| Byte 2 | Least significant Byte of Line number |
| Byte 3 | Most significant Byte of the Line number |
| Byte 4 | Zero |
| Byte 5 | Zero |
| Byte 6 to Byte N-1 | Basic line contents |
| Byte N | Always a carriage return &H0D |

The end of each Basic line is terminated by a carriage return (CR). If this occurred before it should, the BASIC Language would erase the rest of the line contents. Occasions where this might happen are explained in the section on String Packing.

TOKENISED BASIC KEYWORDS: Basic keywords are stored in memory as a single hex byte. This saves memory space. When programs are listed or printed, the keywords are expanded into their full meaning. Table XXX2 has a listing of the hex bytes and their equivalent Basic keyword. When counting the number of bytes in a line, keywords are counted as a single byte only.

STRING PACKING: String packing refers to the imbedding within REM statements of a machine-code routine. Because Sega Basic always starts at the same address in memory (&H9800) then this becomes relatively easy. It must be remembered that the machine-code routine cannot have &HOD or 13 decimal in it, else Basic will think that the line has actually finished, and the remaining machine-code will be lost. Refer to the program listed in Table XX21 for an example of this. Once the program has been RUN, press break and list line 5. The machine-code data statements and poke routine can then be deleted, and the code can be saved as part of a normal program. (Table XX21 in later issue).

COLOUR BYTES: Locations &H9339 and &H933A hold the colour information for the text and graphics screens respectively. The byte is split up into two halves, the first half controls the writing colour, and the other half the background colour. Refer to Table XXX7 for the values which determine each colour. If a Red text on Yellow background is required in the text mode, POKE &H9339, &H8B (8 = Red, B = Yellow).

INKEY\$ STORAGE AREAS: Locations &H9460 onwards store the value received from the keyboard during an INKEY\$ statement. Table XXX4 lists the appropriate key,

value and location for each key press. Note that each key pressed returns a different value, and that several locations are used to store the returned values.

USING INKEY\$ WITH HYBRID PROGRAMS: A hybrid program is a mixture of machine code and Basic. This technique allows fast speed and ease of programming. A typical layout follows:

```
5 REM machine-code program poked into here
10 A$=INKEY$: CALL &H9808 : GOTO 10
20 REM &H9808 is start address of mcode
30 REM and tests key value returned in
40 REM locations &H9460-, then moves the
50 REM ship left, right, fires etc
```

ERRORS MESSAGES: The Basic Error messages are stored at &H73E8 to &H7676. The routine at &H73B7 is used to determine the actual error, and then print it to the screen. The code of the error is passed to the routine, which searches a table for the error code, then loads the text message that follows the error code. The following program lists the various errors and their appropriate code.

```
5 REM MMMMMMMMMMMMMMMMMMMMMMMMMMMMMMMMMMM
10 SCREEN 1,1: CLS
20 FOR X=&H9808 TO &H980E
30 READ A: POKE X,A: NEXT
40 FOR Y=0 TO 70: POKE &H9809,Y
50 PRINT "Y=";Y;" "; CALL &H9808
60 PRINT: NEXT Y
70 DATA &H3E,0,&H4F,&HCD,&HB7,&H73
80 DATA &HC9
```

POWER-UP DIAGNOSTICS ROUTINES: The Sega computer, on power-up, carries out a self-check on the various internal components. Should a failure occur, a jump is made to the fault indication routine, and an audible indication is given to the user. These indications are:

Single Beep = RAM Failure &H6809
Double Beep = ROM Failure &H680D
Triple Beep = Failure &H6811

ROM ROUTINES: These routines are used by the CPU when it communicates with the devices connected to it. These routines can be called independently by the programmer, using a CALL statement. Table XXX3 lists some important ROM routines.

```
10 REM *** CONVERTER ***
20 REM Converts DECIMAL numbers
30 REM to BINARY and HEX
40 REM Peter Biggs 1986
50 REM
60 CLS:NUM$="0123456789ABCDEF"
70 PRINT"Converting DECIMAL Numbers"
80 PRINT"to BINARY and HEX formats":PRINT:PRINT
90 PRINT"Input DECIMAL number: "
100 INPUT DN:IF DN<=0 THEN 60
110 BASE=2:PRINT:PRINT"BINARY: ";
120 IF BASE=16 THEN PRINT:PRINT"HEXADECIMAL: ";
130 DB=DN:J=INT(LOG(DB)/LOG(BASE)+10^(-8))
140 FOR I=J TO 0 STEP -1
150 L=INT(DB/BASE^I):DB=DB-L*BASE^I
160 PRINTMID$(NUM$,L+1,1);NEXT
170 IFBASE=2 THEN BASE=16:GOTO 120
180 PRINT:FOR I=1 TO 38:PRINT"--";NEXT
190 PRINT:GOTO70
```

Table XXX1. RESERVED RAM AREAS.

| Hex Address | Purpose |
|-------------|--|
| 8160/8161 | Start of Basic program |
| 8162/8163 | End of Basic program |
| 8164/8165 | String Storage pointer |
| 8166/8167 | Top of String Storage |
| 8168/8169 | Top of Memory pointer |
| 82A2 | Program found flag, 0 = found |
| 82A3 | Filename being loaded (16 bytes) |
| 83A3 | Filename being saved (16 bytes) |
| 8B30 | Basic Stack Area |
| 8B36 | &H80 bytes. Write to VRAM &H1800 + |
| 9336 | Screen control |
| 9339 | Colour text screen byte |
| 933A | Colour graphics screen byte |
| 9364 | &H80 bytes VRAM stores &H1800 + |
| 9411 | Top range of cursor |
| 9412 | Bottom range of cursor |
| 9413 | 8 bytes for storage of PATTERN command |
| 9420 | &H28 bytes for storage of VRAM data |
| 9460/9480 | INKEY\$ Storage area |
| 9484 | Cursor, 0 = normal, 2 = graphics |
| 9485 | 1 = lowercase, 0 = uppercase |
| 9486 | Keybeep, 0 = beep, 1 = nobeep |
| 9489 | Cursor position X value |
| 948A | Cursor position Y value |
| 948E | Time\$ seconds |
| 948F | Time\$ minutes |
| 9490 | Time\$ hours |
| 9744/9745 | Address of DATA byte |

TABLE XXX3. ROM ROUTINES

| Hex Address | Nature of Routine |
|-------------|---|
| 10C0 - 17BF | Character table (8x8) for VDP |
| 17C0 - 19FF | Basic keywords |
| 1CB1 | Determination of free bytes |
| 2310 | Get next character into DE |
| 2400 | Write character in A to video screen |
| 2BD4 (2BD1) | Read 80 bytes data from VRAM (&H1800) to &H9364, write 80 bytes from &H8B36 to VRAM (&H1800), move 80 bytes at &H9364 to &H8B36 |
| 2C2A (2BCE) | Read data from VRAM |
| 2C32 (2BCB) | Write address in HL to VDP for VRAM read |
| 2C3D (2BC8) | Write data to VRAM |
| 2C44 (2BC5) | Write address in HL to VDP for VRAM write |
| 2C51 (2BC2) | Read VDP Status register |
| 2C54 (2BBF) | Write to a VDP register. Data in A, Register in C. |
| 3604 | Hex conversion routines |
| 3A03 | Delay using the BC register |
| 3A0F | Write Sync bytes to tape |
| 3A12 | Write byte to tape |
| 3B33 | Write 8 bytes from &H9413 to VRAM |
| 3D32 | SCREEN 1,1 |
| 3D90 | SCREEN 2,2 |
| 3DEE | Initialise Text and Graphic screens |
| 3FA0 - 411F | Keyboard characters arranged in matrix form |
| 4120 - 4258 | Basic keyboard symbol table |
| 4590 | Reset TIME\$ to "00:00:00" |
| 4756 | Change cursor to graph |
| 475E | Change cursor to normal |
| 4766 | Change input to lowercase |
| 476E | Change input to uppercase |
| 4918 | INKEY\$ |
| 4A6F | Write text pointed to HL to current screen position |
| 6800 | Restart 00H (Power) |
| 6803 | Restart 38H (VDG) |
| 6806 | NMI Entry (Reset) |
| 6AB5 | Print FRE routine |
| 6C37 | RUN |
| 779F | VERIFY |
| 78EF | LOAD |
| 7A40 | SAVE |

Table XXX2. BASIC KEYWORDS

| | | | |
|-----------------|-------------|---------------|--------------|
| 82 LIST | A0 ON | C1 * | BC MOTOR |
| 83 LLIST | A1 RETURN | C2 / | BD FN |
| 84 AUTO | A2 ERASE | C3 MOD | E1 TO |
| 85 DELETE | A3 CURSOR | C4 + | E2 STEP |
| 86 RUN | A4 IF | C5 - | E3 THEN |
| 87 CONT | A5 RESTORE | C6 < > or > < | E4 TAB |
| 88 LOAD | A6 SCREEN | C7 > = or = > | E5 SFC |
| 89 SAVE | A7 COLOR | C8 < = or = < | CC NOT |
| 8A VERIFY | A8 LINE | C9 > | CD AND |
| 8B NEW | A9 SOUND | CA < | CE OR |
| 8C RENUM | AA BEEP | CB = | CF XOR |
| 90 REM | AB CONSOLE | 8080 ABS | 8081 RND |
| 91 PRINT or ? | AC CLS | 8082 SIN | 8083 COS |
| 92 LPRINT or L? | AD OUT | 8084 TAN | 8085 ASN |
| 93 DATA | AE CALL | 8086 ACS | 8087 ATN |
| 94 DEF | AF POKE | 8088 LOG | 8089 LGT |
| 95 INPUT | B0 PSET | 808A LTW | 808B EXP |
| 96 READ | B1 PRESET | 808C RAD | 808D DEG |
| 97 STOP | B2 PAINT | 808E PI | 808F SQ |
| 98 END | B3 BLINK | 8090 INT | 8091 SGN |
| 99 LET | B4 POSITION | 8092 ASC | 8093 LEN |
| 9A DIM | B5 HCOPY | 8094 VAL | 8095 PEEK |
| 9B FOR | B6 SPRITE | 8096 INP | 8097 FRE |
| 9C NEXT | B7 PATTERN | 8098 VPEEK | 8099 STICK |
| 9D GOTO | B8 CIRCLE | 809A STRIG | 80A0 QRS |
| 9E GOSUB | B9 BCIRCLE | 80A1 HEX\$ | 80A2 INKEY\$ |
| 9F GO | BA MAG | 80A3 LEFT\$ | 80A4 RIGHT\$ |
| CO ^ | BB VPOKE | 80A5 MID\$ | 80A6 STR\$ |
| | | 80A7 TIME\$ | |

TABLE XXX4. INKEY\$ STORAGE AREAS.

| Memory Location | Keys Monitored | Values Returned |
|-----------------|----------------------|-----------------|
| &H9460 | IAZ,KI | 1-8,32-128 |
| &H9461 | 2WSXspc...,LO | 1-128 |
| &H9462 | 3EDCclr/:PO | 1-128 |
| &H9463 | 4RFV,del,pi.@ | 1-128 |
| &H9464 | 5TGBcd] | 1-128 |
| &H9465 | 6YHNcl.cr | 1-8,32-128 |
| &H9466 | 7UJMcrt.cup | 1-8,32,64 |
| &H9467 | Joysticks | 1-8,32,64 |
| &H9468 | eng,fnc,ctr, sht,spc | |

NOTE:

spc = space
 clr = clear
 del = delete
 cd = cursor down
 cl = cursor left
 crt = cursor right
 eng = eng/diers
 fnc = function
 ctr = control
 sht = shift
 cup = cursor up
 cr = carriage return

NOTE: All addresses are for cartridge. Disk addresses next issue.

continued next issue.



continued from p. 3

do would be to print on paper from the Sega Graph and Chart program. Is there any way of doing this?

Keith Maynard, Wellington

EDITOR'S REPLY

2. No suggestions - just gremlins.

3. See Sega Manual that comes with the printer.

continued from p. 10

```

9680 DATA88,"0000000309251414"
9690 DATA89,"0C6F7F6F0F"
9700 DATA90,"0000000080C0E070"
9710 DATA91,"30F0F0E0C0"
9720 DATA92,"000E0E041F1F1E1E"
9730 DATA93,"1E1E0F07"
9740 DATA94,"000020C010E00B38"
9750 DATA95,"70E0C080"
9760 DATA102,"1C1C081C5E3E3E3C"
9770 DATA103,"1C1C1E1F1B1B0B19"
9780 DATA106,"1C1C081E1D1D3C1C"
9790 DATA107,"1C3E373363636630"
9800 DATA108,"00C0F03C1E070301"
9810 DATA110,"000006187BFFFFFB"
9820 DATA111,"E8C4C2C0C0C0C060"
9830 DATA112,"0703"
9840 DATA122,"383810387A7C7C3C"
9850 DATA123,"383878F8D8D8D098"
9860 DATA126,"38381078B8B83C38"
9870 DATA127,"387CECCCC6C6660C"
9880 DATA128,"00006018DEFFFFDF"
9890 DATA129,"1727430303030306"
9900 DATA130,"00030F3C78E0C080"
9910 DATA132,"E0C0"
9920 PATTERN#208,"187E8181"
9930 PATTERN#209,"00007E5A7E243C18"
9940 PATTERN#210,"0F10777212080707"
9950 PATTERN#211,"0810204040404080"
9960 PATTERN#212,"FC065656260EFCF8"
9970 PATTERN#213,"8884828282828241"
9980 PATTERN#214,"3F606E6464603F1F"
9990 PATTERN#215,"1121414141414182"
10000 PATTERN#216,"F008AEAE4810E0E0"
10010 PATTERN#217,"1008040202020281"
10011 PATTERN#218,"FCFCF0F0"
10020 RESTORE9000:F0RR=0T091:READP,
P$:PATTERNS#P,P$:NEXT:P=0:P$="":
GOTO7001

```

HI-SCORE CHALLENGE

| | | |
|----------------|---------|--------------|
| Borderline | 50,000 | Steve Biggs |
| Congo Bongo | 10,000 | Steve Biggs |
| Flicky | 216,220 | Steve Biggs |
| Lode Runner | 38,000 | Steve Biggs |
| Monaco GP | 22,000 | Steve Biggs |
| Pacar | 512,300 | Steve Biggs |
| Pop Flamer | 5,000 | Steve Biggs |
| Sinbad Mystery | 1,000 | Steve Biggs |
| Star Jacker | 398,000 | Steve Biggs |
| Video Flipper | 999,880 | Andre Stokes |
| Yamoto | 50,500 | Steve Biggs |

challenge these Hi-Scores by sending us yours.

continued from p. 24

| Code | Hex | Z80 assembler | - after CBh | - after EDh |
|------|-----|--------------------------------|-------------|-------------|
| 233 | E9 | jp (hl) | set 5,c | |
| 234 | EA | jp pe,NN | set 5,d | |
| 235 | EB | ex de,hl | set 5,e | |
| 236 | EC | call pe,NN | set 5,h | |
| 237 | ED | | set 5,l | |
| 238 | EE | xor N | set 5,(hl) | |
| 239 | EF | rst 40 | set 5,a | |
| 240 | F0 | ret p | set 6,b | |
| 241 | F1 | pop af | set 6,c | |
| 242 | F2 | jp p,NN | set 6,d | |
| 243 | F3 | di | set 6,e | |
| 244 | F4 | call p,NN | set 6,h | |
| 245 | F5 | push af | set 6,l | |
| 246 | F6 | or N | set 6,(hl) | |
| 247 | F7 | rst 48 | set 6,a | |
| 248 | F8 | ret m | set 7,b | |
| 249 | F9 | ld sp,hl | set 7,c | |
| 250 | FA | jp m,NN | set 7,d | |
| 251 | FB | ei | set 7,e | |
| 252 | FC | call m,NN | set 7,h | |
| 253 | FD | prefixes instructions using iy | set 7,l | |
| 254 | FE | cp N | set 7,(hl) | |
| 255 | FF | rst 56 | set 7,a | |

STOP PRESS!
JUST ARRIVED...



INTERNATIONAL
HEADPHONE
RADIO

GREAT FOR THE WORKSHOP, BEACH,
LISTENING TO CRICKET, NEWS ETC.

IDEAL FOR A CHRISTMAS GIFT.

\$49.95 (incl. p&h) AVAILABLE FROM
SEGA SOFTWARE SUPPORT.

**LOCAL
USER
CONTACTS**

**AUCKLAND (NTH SHORE)
SEGA USER GROUP (1)**

Contact: Andrew Flexman
426 Glenfield Road
Glenfield
AUCKLAND
Ph: 444-8244

**AUCKLAND (NTH SHORE) SEGA USER
GROUP (2)**

Contact: Norman Raynel
78 Anzac Street
Takapuna
AUCKLAND
Ph: 496-841

PUKEKOHE SEGA USER GROUP

Contact: Selwyn Easton
4 Roose Ave
PUKEKOHE
Ph: 86-583

**SOUTH COROMANDEL SEGA USER
GROUP**

Sid Hawken
P.O. Box 183
WHANGAMATA
Ph: 58-775

HAMILTON SEGA USER GROUP

P.O. Box 1548 Hamilton
President: Mr Colin Bell Ph: 73-826
Secretary: Mrs Anne Thrush Ph: 437-312
Meetings held 2nd and 4th Monday of
each month at Whitiara Community
Centre Willoughby St at 7.30pm

ROTORUA SEGA USER GROUP

Contact: Terry Cole
P.O. Box 7140
Te Ngae
ROTORUA
Ph: 59-325 AH

NAPIER SEGA USER GROUP

Contact: Reid Duncan
Store Manager
Agnews Refrigeration
Ph: 55-857 57-431

WELLINGTON SEGA USER GROUP

Contact: Shaun Parsons
P.O. Box 1871
WELLINGTON
Ph: 897-095(ah) 727-666(bus)

TIMARU SEGA USER GROUP

Contact: John Oliver
South Canterbury Computer User Group
P.O. Box 73
TIMARU
Ph: 26-300

HAWERA SEGA USER GROUP

Contact: D M Beale
7A Clive Street
HAWERA
Ph: 85-108

OAMARU SEGA USER GROUP

Contact: Bill Dowman
99 Aln Street
OAMARU
Ph: 46-250

CHRISTCHURCH SEGA USER GROUP

Contact: James O'Donnell
15 Jebson Street
Shirley
CHRISTCHURCH
Ph: 856-884

DUNEDIN SEGA USER GROUP

Central City Computer Interest Group
Box 5260
Moray Place
DUNEDIN
Contact: Graeme Simpson, Saddle Hill,
R.D.1, Dunedin
Ph: (089) 6374

OVERSEAS SEGA USERS CLUBS

Klaus Pinker
P.O. Box 18
Belconnen
ACT 2616
Ph: 062 30 2334

Scott McDonald
2 Coolalie Ave
Camden
NSW 2570
Ph: 046 668 956

John McLennan
65 Highclere Blvd
Marangaroo
WA 6064
Ph: 09 342 3905

Jan Jacobson
10 Pioneer Ave
O'Sullivan's Beach
SA 5166
Ph: 08 382 7967

Les Beacall
1/41 Cameron Road
Croydon
VIC 3136
Ph: 03 725 0864

Wayne Ariel
35 Leanne Street
Marsden
QLD 4203

FOR SALE

Sega 4-colour
Plotter/Printer. As
new. \$250.00. Ph:
Ak 817-7115 or
794-550


**WANTED TO
BUY/BORROW**

June 1985 issue of
Sega Computer
Magazine or copy
of Hi Res screen
dump to SP400
printer program.

Ron Bannister, 25
Shortt Ave,
Mangere, Auckland.
Ph: 665-221 or
641-348

**NEWS!
NEWS!
NEWS!**

We will be at
the Sport &
Recreation
Fieldays at
Mystery Creek,
Hamilton on
November
8th/9th
supporting the
Hamilton Sega
User Group.

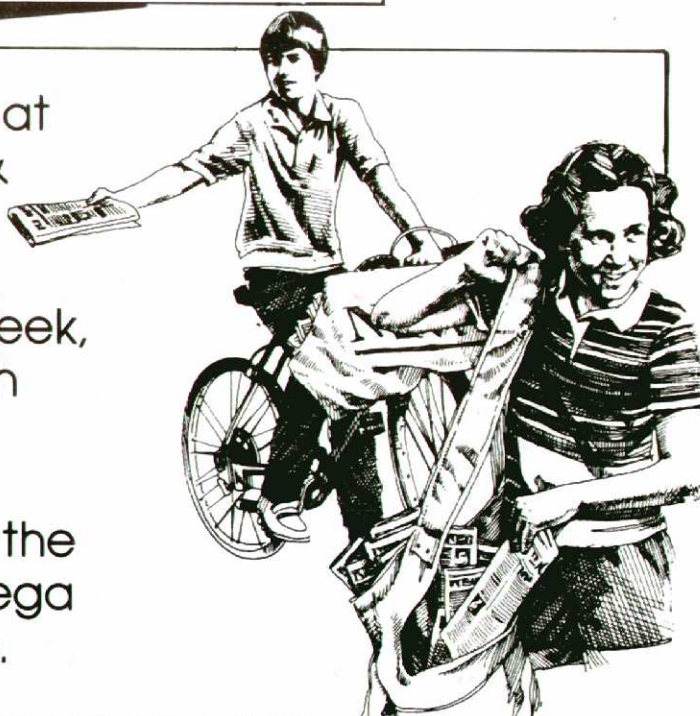

SEGA

GAMES CARTRIDGE SOFTWARE

701 BORDERLINE

Manoeuvre your jeep forward and backward to fight the enemy as you seek to destroy their fortresses and headquarters. Real action.

702 CHAMPION BASEBALL

Squeeze, steal, and double play...!! play the computer or your friends. Very enjoyable.

703 CHAMPION TENNIS

Serve, receive and smash. Attack your rival's weak point. Very competitive.

704 CONGO BONGO

Watch out for falling coconuts and pesky monkeys as you attempt to preserve the hunter's honour and capture the gorilla.



705 MONACO GP

The race of your life with you at the wheel. Avoid the other cars, the ambulance etc. and above all watch those sign posts!! Exciting

706 PACAR

Sega's own version of Pacman. Can you keep up the torrid pace while destroying as many enemy cars as possible?

707 POP FLAMER

A mouse that operates a flame thrower! 3 monsters to be eliminated here. Be especially wary of the Haradon.

708 SINBAD MYSTERY

Enjoy the cheerful adventures of Sinbad in his search for a chest of gold hidden on Treasure Island.

709 STAR JACKER

A "new feeling" space game. Glorious space troops fight against the invading "Dester" army. Fun for all the family.

710 VIDEO FLIPPER

Pinball fun for all. A colourful exciting game of skill needing split second timing. Even your five year old will love this.

711 YAMATO

A fierce battle against the enemy's torpedoes and missiles. Can you survive - you'll need all your wits about you.

Only Available from SEGA SOFTWARE SUPPORT

P.O. Box 10-207
Auckland 4 New Zealand



The Fuel for thousands of Sega Users up and down the country
No serious Sega owner should be without

The complete range of the official Sega User Club magazines.
Are you missing any?

